



# Foton Bridgespot Double

AVOLUX®



2x32w
2700K-5000K
Ra+80  
Ra+90
IP20

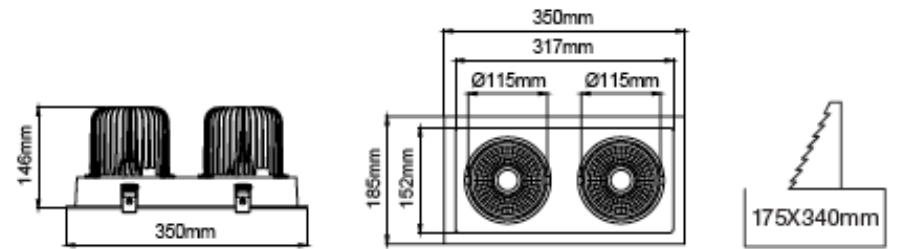

## Electrical Paramaters

<b>Base Model No.:</b>	<b>LL.I01.MLR.14002</b>
Led Type:	Philips (39), Tridonic (44), Cree (06)
Colours:	White, black, silver
Wattage:	2x32W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	20°, 30°, 50°
CRI:	Ra+80, Ra+90

## Features

- Die-cast aluminium body.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Clear safety glass.
- Honeycomb filter accessory available.
- An emergency kit can be integrated.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLR.14002-WH/3/50	2x32W	3000K	7800lm	White	50°
LL.I01.MLR.14002-WH/3.5/50	2x32W	3500K	8050lm	White	50°
LL.I01.MLR.14002-WH/4/50	2x32W	4000K	8300lm	White	50°
LL.I01.MLR.14002-GR/3/50	2x32W	3000K	7800lm	Grey	50°
LL.I01.MLR.14002-GR/3.5/50	2x32W	3500K	8050lm	Grey	50°
LL.I01.MLR.14002-GR/4/50	2x32W	4000K	8300lm	Grey	50°
LL.I01.MLR.14002-BL/3/50	2x32W	3000K	7800lm	Black	50°
LL.I01.MLR.14002-BL/3.5/50	2x32W	3500K	8050lm	Black	50°
LL.I01.MLR.14002-BL/4/50	2x32W	4000K	8300lm	Black	50°