


# Linear Led Double Assymmetric

AVOLUX®

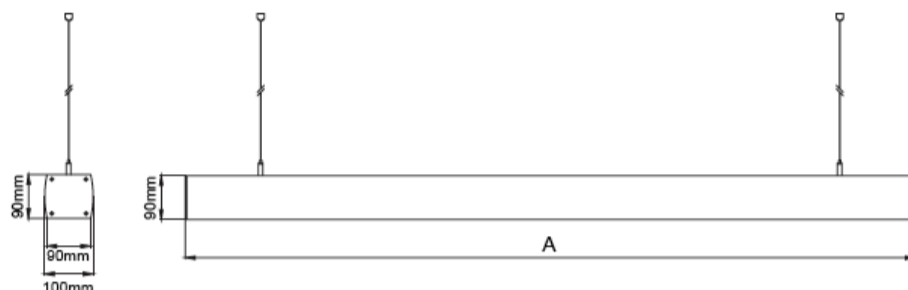

52w

2700K-5000K

Ra+80

IP20



IP 20

## Electrical Parameters

|                        |                        |
|------------------------|------------------------|
| <b>Base Model No.:</b> | <b>LL.I02.LL.19420</b> |
| Colours:               | White, black, silver   |
| Wattage:               | 52W                    |
| Length:                | 1500mm                 |
| CCT:                   | 2700K - 5000K          |
| Beam Angle:            | 2x20, 2x30             |
| IP Rating:             | IP 20                  |
| CRI:                   | Ra+80                  |

## Features

- Aluminium profile body.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- Double assymmetric reflector design enables illuminating densely both directions with minimum UGR.
- Over 100%/W efficiency.
- An emergency kit system can be integrated.

## Specifications

| Model                        | Wattage | CCT   | Lumens | Colour | Beam Angle |
|------------------------------|---------|-------|--------|--------|------------|
| LL.I02.LL.19420.55-WH/3/40   | 52w     | 3000K | 6500lm | White  | 2x30       |
| LL.I02.LL.19420.55-WH/3.5/40 | 52w     | 3500K | 6625lm | White  | 2x30       |
| LL.I02.LL.19420.55-WH/4/40   | 52w     | 4000K | 6750lm | White  | 2x30       |
| LL.I02.LL.19420.55-GR/3/40   | 52w     | 3000K | 6500lm | Grey   | 2x30       |
| LL.I02.LL.19420.55-GR/3.5/40 | 52w     | 3500K | 6625lm | Grey   | 2x30       |
| LL.I02.LL.19420.55-GR/4/40   | 52w     | 4000K | 6750lm | Grey   | 2x30       |
| LL.I02.LL.19420.55-BL/3/40   | 52w     | 3000K | 6500lm | Black  | 2x30       |
| LL.I02.LL.19420.55-BL/3.5/40 | 52w     | 3500K | 6625lm | Black  | 2x30       |
| LL.I02.LL.19420.55-BL/4/40   | 52w     | 4000K | 6750lm | Black  | 2x30       |