


Linear Led Narrow Surface Mounted

AVOLUX®

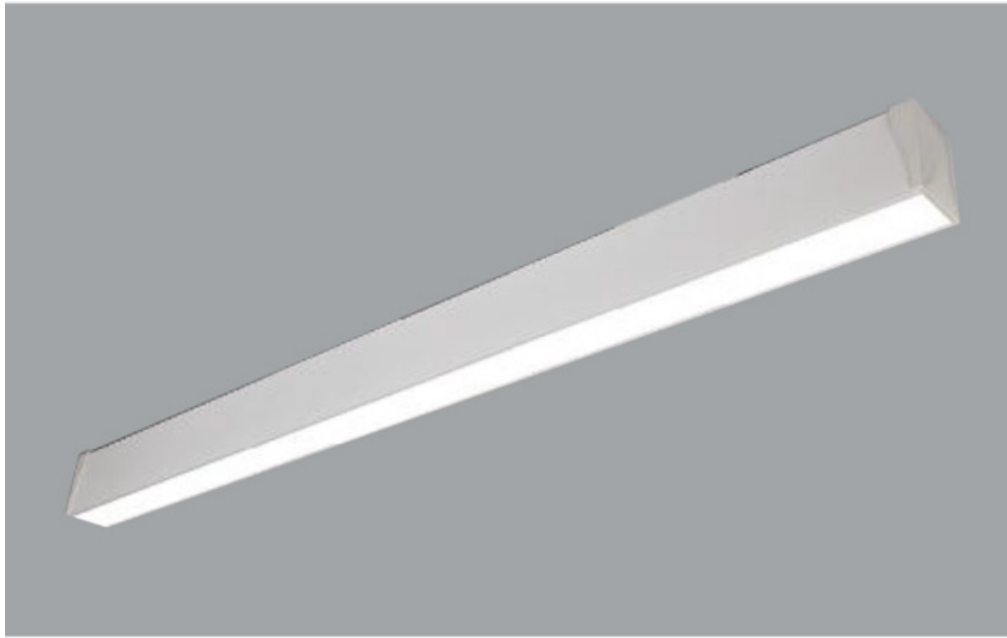

Electrical Parameters

| | |
|------------------------|--------------------------------|
| Base Model No.: | LL.I02.LL.19181 |
| Colours: | White, black, silver |
| Wattage: | 23W, 27.5W, 32W, 36.5W |
| Length: | 1148mm, 1428mm, 1708mm, 1988mm |
| Beam Angle: | 112 |
| CCT: | 2700K - 5000K |
| IP Rating: | IP 20 |
| CRI: | Ra+80 |

Features

- Aluminium profile body.
- Plastic end caps.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- Opal diffuser.
- Over 100%/W efficiency.
- An emergency kit system can be integrated.
- Surface mounting with aluminium wedge accessory. Alternatively, direct mounting to the ceiling is possible by removing the diffuser.

Specifications

| Model | Wattage | CCT | Lumens | Colour | Beam Angle |
|----------------------------|---------|-------|--------|--------|------------|
| LL.I02.LL.19818-WH/3/112 | 36.5W | 3000K | 2440lm | White | 112 |
| LL.I02.LL.19818-WH/3.5/112 | 36.5W | 3500K | 2557lm | White | 112 |
| LL.I02.LL.19818-WH/4/112 | 36.5W | 4000K | 2675lm | White | 112 |
| LL.I02.LL.19818-GR/3/112 | 36.5W | 3000K | 2440lm | Grey | 112 |
| LL.I02.LL.19818-GR/3.5/112 | 36.5W | 3500K | 2557lm | Grey | 112 |
| LL.I02.LL.19818-GR/4/112 | 36.5W | 4000K | 2675lm | Grey | 112 |
| LL.I02.LL.19818-BL/3/112 | 36.5W | 3000K | 2440lm | Black | 112 |
| LL.I02.LL.19818-BL/3.5/112 | 36.5W | 3500K | 2557lm | Black | 112 |
| LL.I02.LL.19818-BL/4/112 | 36.5W | 4000K | 2675lm | Black | 112 |