


Linear Led Karo x2

AVOLUX®

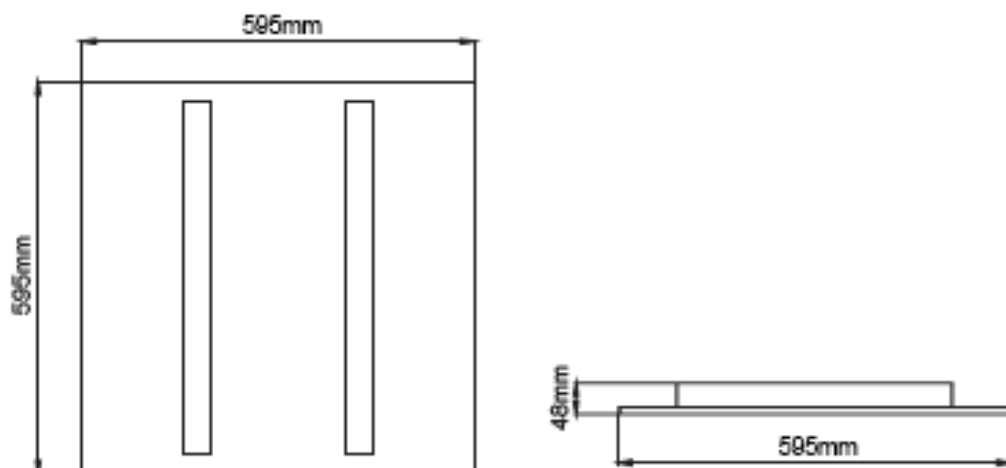

19W

2700K-5000K

Ra+80

IP20



Electrical Paramaters

Base Model No.:	LL.I02.LL.19727
Colours:	White, black, silver
Wattage:	19W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	105°
CRI:	Ra+80

Features

- Sheet steel body.
- Microprismatic PMMA opal diffuser.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- 1-10V and DALI dimming options available upon request.
- Over 100%/W efficiency.
- An emergency kit system can be integrated.
- Designed for T-Bar ceilings.
- Electronic LED driver positioned outside of the luminaire and connected with wieland connector.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I02.LL.19727.20-WH/3/105	19W	3000K	2300lm	White	105°
LL.I02.LL.19727.20-WH/3.5/105	19W	3500K	2350lm	White	105°
LL.I02.LL.19727.20-WH/4/105	19W	4000K	2400lm	White	105°
LL.I02.LL.19727.20-GR/3/105	19W	3000K	2300lm	Grey	105°
LL.I02.LL.19727.20-GR/3.5/105	19W	3500K	2350lm	Grey	105°
LL.I02.LL.19727.20-GR/4/105	19W	4000K	2400lm	Grey	105°
LL.I02.LL.19727.20-BL/3/105	19W	3000K	2300lm	Black	105°
LL.I02.LL.19727.20-BL/3.5/105	19W	3500K	2350lm	Black	105°
LL.I02.LL.19727.20-BL/4/105	19W	4000K	2400lm	Black	105°