


Linear Led Narrow Suspended

AVOLUX®

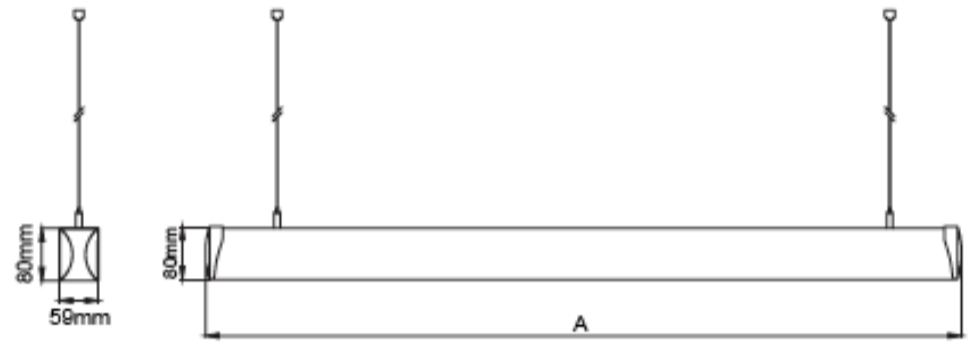

36.5w

2700K-5000K

Ra+80

IP20



Electrical Paramaters

Base Model No.:	LL.I02.LL.19180
Colours:	White, black, silver
Wattage:	23W, 27.5W, 32W, 36.5W
Lenght:	1130mm, 1428mm, 1708mm, 1988mm
Beam Angle:	112°
CCT:	2700K - 5000K
IP Rating:	IP 20
CRI:	Ra+80

Features

- Aluminium profile body.
- Plastic end caps.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- Opal diffuser.
- Over 100%/W efficiency.
- An emergency kit system can be integrated.
- Steel suspension cord with up to 5m lenght option.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I02.LL.19180.40.39-WH/3/112	36.5W	3000K	2850lm	White	112°
LL.I02.LL.19180.40.39-WH/3.5/112	36.5W	3500K	2987lm	White	112°
LL.I02.LL.19180.40.39-WH/4/112	36.5W	4000K	3125lm	White	112°
LL.I02.LL.19180.40.39-GR/3/112	36.5W	3000K	2850lm	Grey	112°
LL.I02.LL.19180.40.39-GR/3.5/112	36.5W	3500K	2987lm	Grey	112°
LL.I02.LL.19180.40.39-GR/4/112	36.5W	4000K	3125lm	Grey	112°
LL.I02.LL.19180.40.39-BL/3/112	36.5W	3000K	2850lm	Black	112°
LL.I02.LL.19180.40.39-BL/3.5/112	36.5W	3500K	2987lm	Black	112°
LL.I02.LL.19180.40.39-BL/4/112	36.5W	4000K	3125lm	Black	112°