


Linear Led Rood with White Low Glare Louver

AVOLUX®

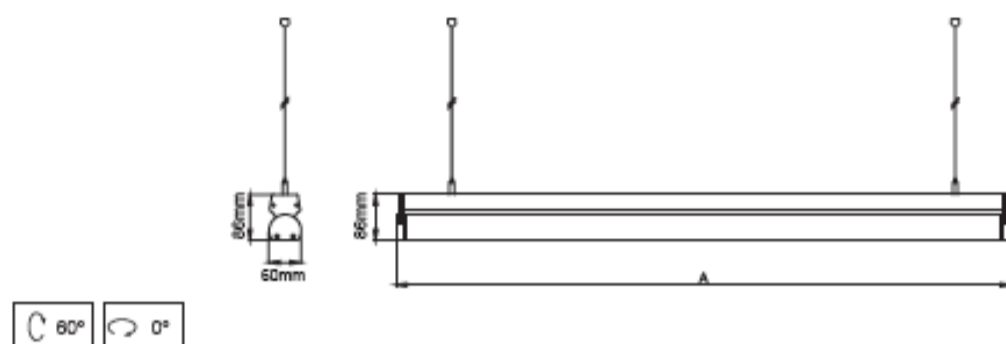

62w

2700K-5000K

Ra+80

IP20



Electrical Paramaters

Base Model No.:	LL.I02.LL.19214
Colours:	White, black, silver
Wattage:	33W, 41W, 51W, 62W
Lenght:	840mm, 1120mm, 1400mm, 1680mm
CCT:	2700K - 5000K
IP Rating:	IP 20
CRI:	Ra+80

Features

- Aluminium profile body.
- Plastic end caps.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- White painted raster louver decreases UGR.
- Tilttable light head.
- An emergency kit system can be integrated.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I02.LL.19214.40.65-WH/3	62w	3000K	5500lm	White	/
LL.I02.LL.19214.40.65-WH/3.5	62w	3500K	5600lm	White	/
LL.I02.LL.19214.40.65-WH/4	62w	4000K	5700lm	White	/
LL.I02.LL.19214.40.65-GR/3	62w	3000K	5500lm	Grey	/
LL.I02.LL.19214.40.65-GR/3.5	62w	3500K	5600lm	Grey	/
LL.I02.LL.19214.40.65-GR/4	62w	4000K	5700lm	Grey	/
LL.I02.LL.19214.40.65-BL/3	62w	3000K	5500lm	Black	/
LL.I02.LL.19214.40.65-BL/3.5	62w	3500K	5600lm	Black	/
LL.I02.LL.19214.40.65-BL/4	62w	4000K	5700lm	Black	/