


# Linear Led Cubus Surface

AVOLUX®

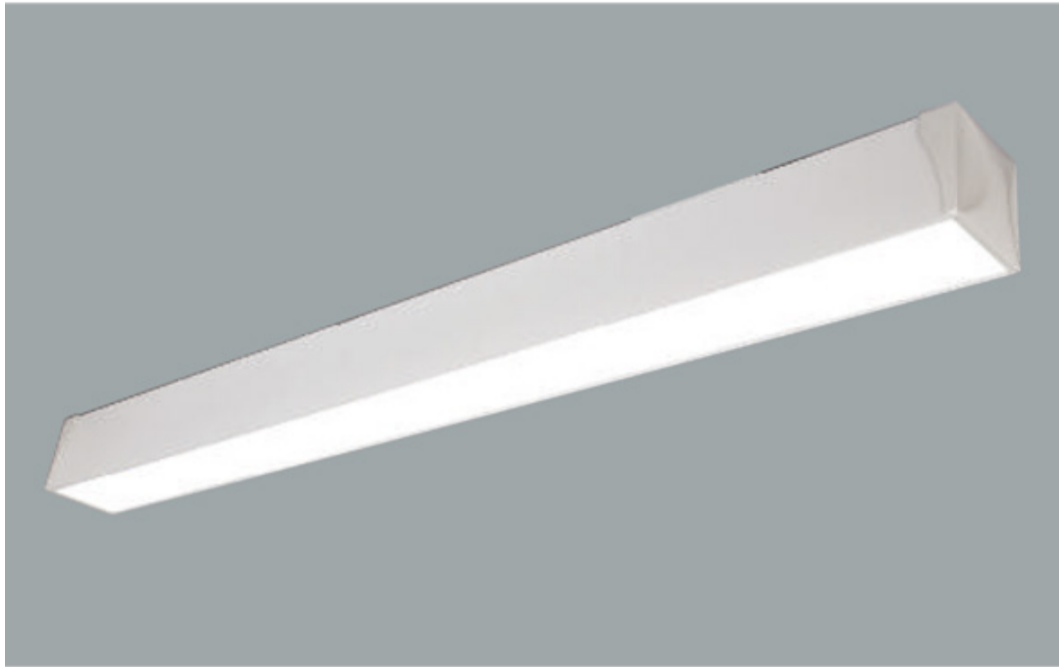

62W

2700K-5000K

Ra+80

IP20



## Electrical Parameters

<b>Base Model No.:</b>	<b>LL.I02.LL.19152</b>
Colours:	White, black, silver
Wattage:	41W, 51.5W, 62W
Length:	1157mm, 1437mm, 1717mm
CCT:	2700K - 5000K
Beam angle:	110°
IP Rating:	IP 20
CRI:	Ra+80

## Features

- Aluminium profile body.
- Plastic end caps.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- Opal diffuser.
- Overt 100%/W efficiency.
- An emergency kit system can be integrated.
- Surface mounting with aluminium wedge accessory. Alternatively, direct mounting to the ceiling by removing the diffuser is possible.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I02.LL.19152-WH/3/110	62W	3000K	4460lm	White	110°
LL.I02.LL.19152-WH/3.5/110	62W	3500K	4540lm	White	110°
LL.I02.LL.19152-WH/4/110	62W	4000K	4650lm	White	110°
LL.I02.LL.19152-GR/3/110	62W	3000K	4460lm	Grey	110°
LL.I02.LL.19152-GR/3.5/110	62W	3500K	4540lm	Grey	110°
LL.I02.LL.19152-GR/4/110	62W	4000K	4650lm	Grey	110°
LL.I02.LL.19152-BL/3/110	62W	3000K	4460lm	Black	110°
LL.I02.LL.19152-BL/3.5/110	62W	3500K	4540lm	Black	110°
LL.I02.LL.19152-BL/4/110	62W	4000K	4650lm	Black	110°