


# Linear Led Systema Double Assymmetric Reflector

AVOLUX®

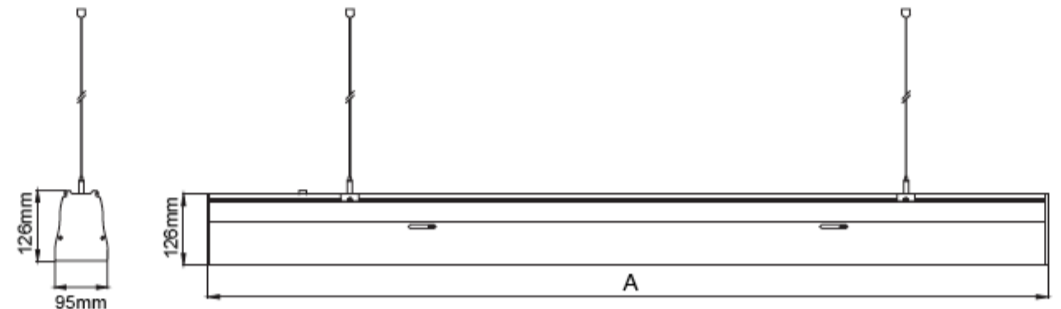

## Electrical Paramaters

<b>Base Model No.:</b>	<b>LL.I02.LL.19465</b>
Colours:	White, black, silver
Wattage:	52W
Lenght:	1510mm
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	2x20°, 2x30°
CRI:	Ra+80

## Features

- Aluminium profile body.
- Plastic end caps.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- Double assymmetric reflector design enables illuminating densly both directions with minimum UGR.
- Over 100%/W efficiency.
- An emergency kit system can be integrated.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I02.LL.19465.55-WH/3/ 2x30	52W	3000K	6500lm	White	2x30°
LL.I02.LL.19465.55-WH/3.5/2x30	52W	3500K	6625lm	White	2x30°
LL.I02.LL.19465.55-WH/4/2x30	52W	4000K	6750lm	White	2x30°
LL.I02.LL.19465.55-GR/3/2x30	52W	3000K	6500lm	Grey	2x30°
LL.I02.LL.19465.55-GR/3.5/2x30	52W	3500K	6625lm	Grey	2x30°
LL.I02.LL.19465.55-GR/4/2x30	52W	4000K	6750lm	Grey	2x30°
LL.I02.LL.19465.55-BL/3/2x30	52W	3000K	6500lm	Black	2x30°
LL.I02.LL.19465.55-BL/3.5/ 2x30	52W	3500K	6625lm	Black	2x30°
LL.I02.LL.19465.55-BL/4/2x30	52W	4000K	6750lm	Black	2x30°