


Linear Led Systema High bay - Low bay

AVOLUX®



51w 2700K-5000K Ra+80 IP20

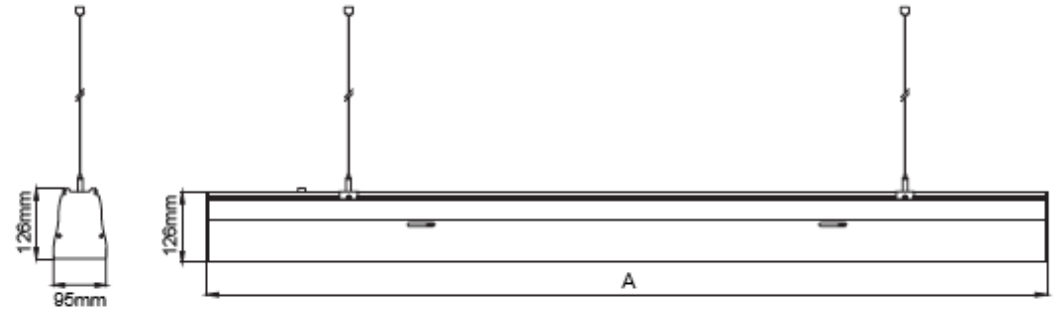

Electrical Paramaters

Base Model No.:	LL.I02.LL.19470
Colours:	White, black, silver
Wattage:	51W
Lenght:	1510mm
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	40°, 80°
CRI:	Ra+80

Features

- Aluminium profile body.
- Plastic end caps.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- 1-10V and DALI dimming options available upon request.
- 40° medium beam for high bay and 80° wide beam angle reflector for low bay applications.
- Over 100%/W efficiency with custom design Miro 20 Silver reflector with matt finishes.
- An emergency kit system can be integrated.
- Continuous line installation is possible.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I02.LL.19470.55-WH/3/80	51W	3000K	7400lm	White	80°
LL.I02.LL.19470.55-WH/3.5/80	51W	3500K	7550lm	White	80°
LL.I02.LL.19470.55-WH/4/80	51W	4000K	7700lm	White	80°
LL.I02.LL.19470.55-GR/3/80	51W	3000K	7400lm	Grey	80°
LL.I02.LL.19470.55-GR/3.5/80	51W	3500K	7550lm	Grey	80°
LL.I02.LL.19470.55-GR/4/80	51W	4000K	7700lm	Grey	80°
LL.I02.LL.19470.55-BL/3/80	51W	3000K	7400lm	Black	80°
LL.I02.LL.19470.55-BL/3.5/80	51W	3500K	7550lm	Black	80°
LL.I02.LL.19465.55-BL/4/80	51W	4000K	7700lm	Black	80°