


# Linear Led Systema

## Low Glare large louver

AVOLUX®

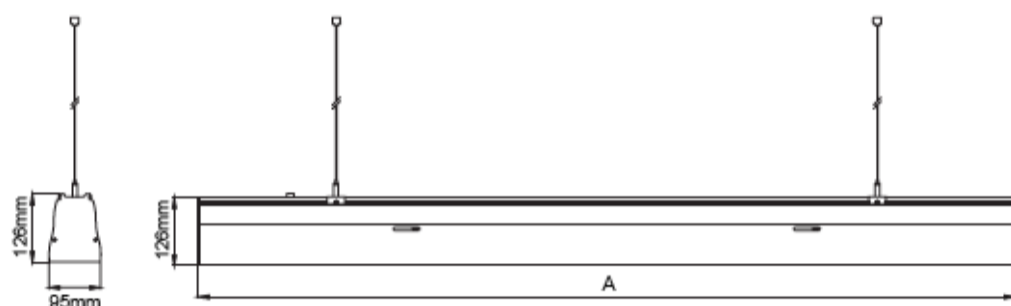

51w

2700K-5000K

Ra+80

IP20



IP 20

### Electrical Parameters

<b>Base Model No.:</b>	<b>LL.I02.LL.19455</b>
Colours:	White, black, silver
Wattage:	51W
Length:	1510mm
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	70°
CRI:	Ra+80

### Features

- Aluminium profile body.
- Plastic end caps.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- 1-10V and DALI dimming options available upon request.
- Less number of louvers placed on reflector aiming maximum lumen output at still acceptable UGR level in offices.
- Over 100%/W efficiency.
- An emergency kit system can be integrated.

### Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I02.LL.19455.55-WH/3/70	51W	3000K	7400lm	White	70°
LL.I02.LL.19455.55-WH/3.5/70	51W	3500K	7550lm	White	70°
LL.I02.LL.19455.55-WH/4/70	51W	4000K	7700lm	White	70°
LL.I02.LL.19455.55-GR/3/70	51W	3000K	7400lm	Grey	70°
LL.I02.LL.19455.55-GR/3.5/70	51W	3500K	7550lm	Grey	70°
LL.I02.LL.19455.55-GR/4/70	51W	4000K	7700lm	Grey	70°
LL.I02.LL.19455.55-BL/3/70	51W	3000K	7400lm	Black	70°
LL.I02.LL.19455.55-BL/3.5/70	51W	3500K	7550lm	Black	70°
LL.I02.LL.19455.55-BL/4/70	51W	4000K	7700lm	Black	70°