


# Linear Led Bar Squared

AVOLUX®

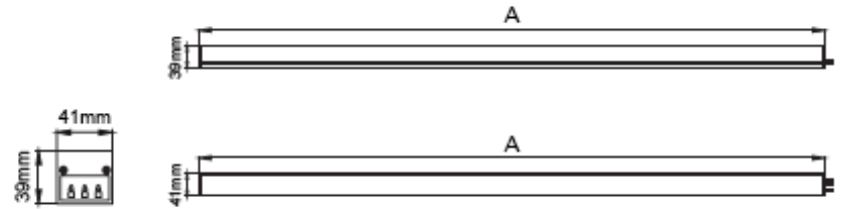

## Electrical Parameters

<b>Base Model No.:</b>	<b>LL.I02.LL.19315</b>
Colours:	White, black, silver
Wattage:	30W, 41W, 51.5W, 62W
Length:	850mm, 1130mm, 1410mm, 1690mm
CCT:	2700K - 5000K
IP Rating:	IP 20
CRI:	Ra+80

## Features

- Aluminium profile body.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- Opal diffuser.
- Wieland sockets at both ends enable this product to be installed in continuous mounting system.
- Plastic installation clips enable easy mounting with quick click and lock system.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I02.LL.19315-WH/3	62W	3000K	4460lm	White	/
LL.I02.LL.19315-WH/3.5	62W	3500K	4540lm	White	/
LL.I02.LL.19315-WH/4	62W	4000K	4650lm	White	/
LL.I02.LL.19315-GR/3	62W	3000K	4460lm	Grey	/
LL.I02.LL.19315-GR/3.5	62W	3500K	4540lm	Grey	/
LL.I02.LL.19315-GR/4	62W	4000K	4650lm	Grey	/
LL.I02.LL.19315-BL/3	62W	3000K	4460lm	Black	/
LL.I02.LL.19315-BL/3.5	62W	3500K	4540lm	Black	/
LL.I02.LL.19315--BL/4	62W	4000K	4650lm	Black	/