


# Manna Bridgespot Double

AVOLUX®

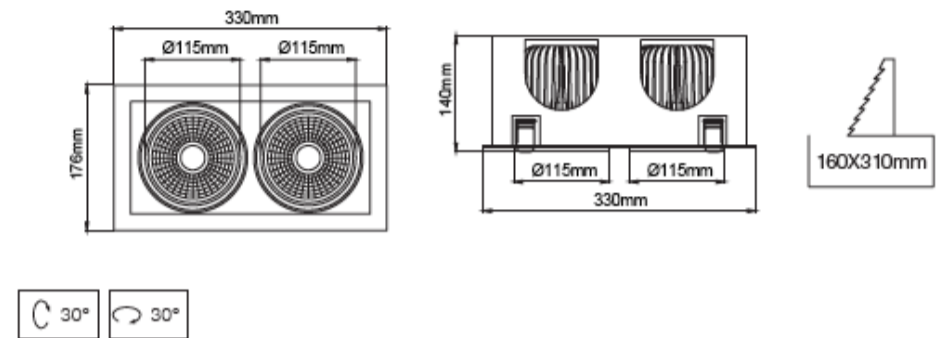

2x32w
2700K-5000K
Ra+80  
Ra+90
IP20

IP 20

## Electrical Paramaters

<b>Base Model No.:</b>	<b>LL.I01.MLR.09002</b>
LED Manufacturer:	Philips (39), Tridonic (44), Cree (06)
Colours:	White, black, silver
Wattage:	2x32W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	20°, 30°, 50°
CRI:	Ra+80, Ra90+

## Features

- Die-cast aluminium body.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Clear safety glass.
- Honeycomb filter accessory available.
- Narrow, medium and wide beam angle options available with rotationally symmetric light distribution.
- An emergency kit can be integrated.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLR.09002-WH/3/50	2x32W	7800K	560lm	White	50°
LL.I02.PLR.01027-WH/3.5/50	2x32W	8050K	580lm	White	50°
LL.I02.PLR.01027-WH/4/50	2x32W	8300K	600lm	White	50°
LL.I02.PLR.01027-GR/3/50	2x32W	7800K	560lm	Grey	50°
LL.I02.PLR.01027-GR/3.5/50	2x32W	8050K	580lm	Grey	50°
LL.I02.PLR.01027-GR/4/50	2x32W	8300K	600lm	Grey	50°
LL.I02.PLR.01027-BL/3/50	2x32W	7800K	560lm	Black	50°
LL.I02.PLR.01027-BL/3.5/50	2x32W	8050K	580lm	Black	50°
LL.I02.PLR.01027-BL/4/50	2x32W	8300K	600lm	Black	50°