


Mini Torres Bridgespot

AVOLUX®

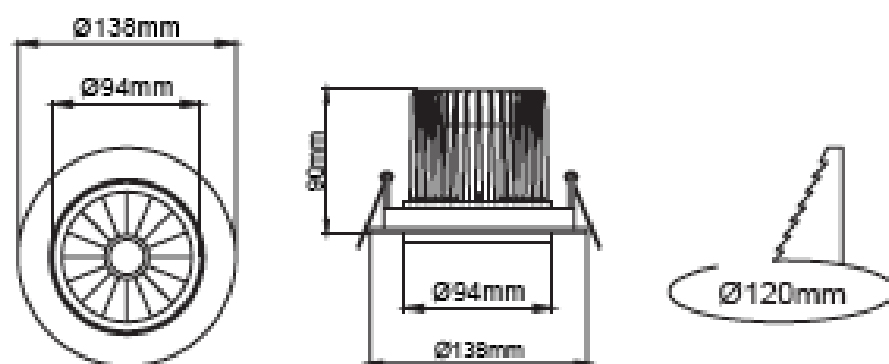

27w

2700K-
5000K

Ra+80
Ra+90

IP20



Electrical Paramaters

Base Model No.:	LL.I01.MLR.17010
Led Type:	Philips (39), Bridgelux (01), Samsung (45)
Colours:	White, black, silver
Wattage:	27W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	20°, 30°, 40°
CRI:	Ra+80, Ra+90

Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Clear safety glass.
- Honeycomb filter accessory available.
- Emergency kit system can be integrated.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLR.17010-WH/3/40	27W	3000K	2900lm	White	40°
LL.I01.MLR.17010-WH/3.5/40	27W	3500K	2950lm	White	40°
LL.I01.MLR.17010-WH/4/40	27W	4000K	3000lm	White	40°
LL.I01.MLR.17010-GR/3/40	27W	3000K	2900lm	Grey	40°
LL.I01.MLR.17010-GR/3.5/40	27W	3500K	2950lm	Grey	40°
LL.I01.MLR.17010-GR/4/40	27W	4000K	3000lm	Grey	40°
LL.I01.MLR.17010-BL/3/40	27W	3000K	2900lm	Black	40°
LL.I01.MLR.17010-BL/3.5/40	27W	3500K	2950lm	Black	40°
LL.I01.MLR.17010-BL/4/40	27W	4000K	3000lm	Black	40°

EXPERIENCE **LA LUCE**

Experience La Luce
Ph: (02) 9698 8029 Fax: (02) 9698 8000
admin@exlaluce.com.au
www.exlaluce.com.au