


Rayspot Mini Bridgespot

AVOLUX®

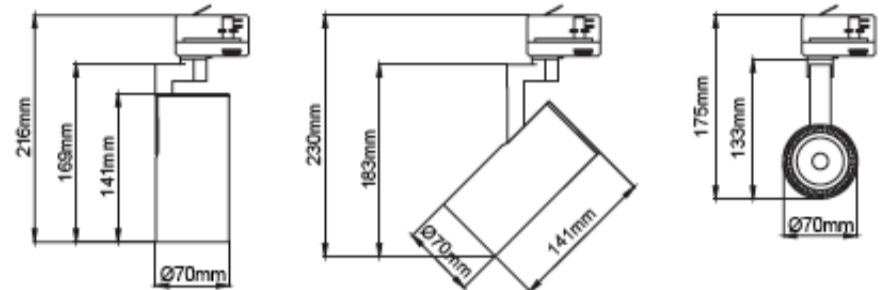

Electrical Parameters

Base Model No.:	LL.I01.MLT.17160
LED Type:	Bridgelux(39)
Colours:	White, black, silver
Wattage:	12W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	20°, 36°, 50°
CRI:	Ra+80, Ra+90

Features

- Die-cast aluminium body.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- With 3-phase universal track adaptor.
- Dimming option with integrated potentiometer.
- Honeycomb filter and barndoor accessories available.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLT.17160-WH/3/50	12w	3000K	1000lm	White	50°
LL.I01.MLT.17160-WH/3.5/50	12w	3500K	1025lm	White	50°
LL.I01.MLT.17160-WH/4/50	12w	4000K	1050lm	White	50°
LL.I01.MLT.17160-GR/3/50	12w	3000K	1000lm	Grey	50°
LL.I01.MLT.17160-GR/3.5/50	12w	3500K	1025lm	Grey	50°
LL.I01.MLT.17160-GR/4/50	12w	4000K	1050lm	Grey	50°
LL.I01.MLT.17160-BL/3/50	12w	3000K	1000lm	Black	50°
LL.I01.MLT.17160-BL/3.5/50	12w	3500K	1025lm	Black	50°
LL.I01.MLT.17160-BL/4/50	12w	4000K	1050lm	Black	50°