


Cub Mini Bridgespot

AVOLUX®

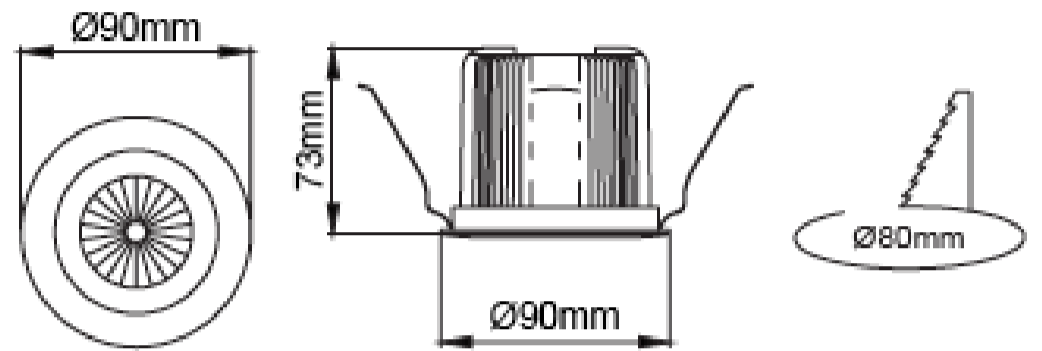

Electrical Parameters

Base Model No.:	LL.I01.MLR.14024
Led Type:	Bridgelux (01)
Colours:	White, black, silver
Wattage:	7W
CCT:	2700K - 5000K
IP Rating:	IP 40
Beam Angle:	30°, 50°
CRI:	Ra+80

Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLR.14024.01-WH/3/50	7W	3000K	530lm	White	50°
LL.I01.MLR.14024.01-WH/3.5/50	7W	3500K	545lm	White	50°
LL.I01.MLR.14024.01-WH/4/50	7W	4000K	560lm	White	50°
LL.I01.MLR.14024.01-GR/3/50	7W	3000K	530lm	Grey	50°
LL.I01.MLR.14024.01-GR/3.5/50	7W	3500K	545lm	Grey	50°
LL.I01.MLR.14024.01-GR/4/50	7W	4000K	560lm	Grey	50°
LL.I01.MLR.14024.01-BL/3/50	7W	3000K	530lm	Black	50°
LL.I01.MLR.14024.01-BL/3.5/50	7W	3500K	545lm	Black	50°
LL.I01.MLR.14024.01-BL/4/50	7W	4000K	560lm	Black	50°