


Darklight Bridgespot

AVOLUX®

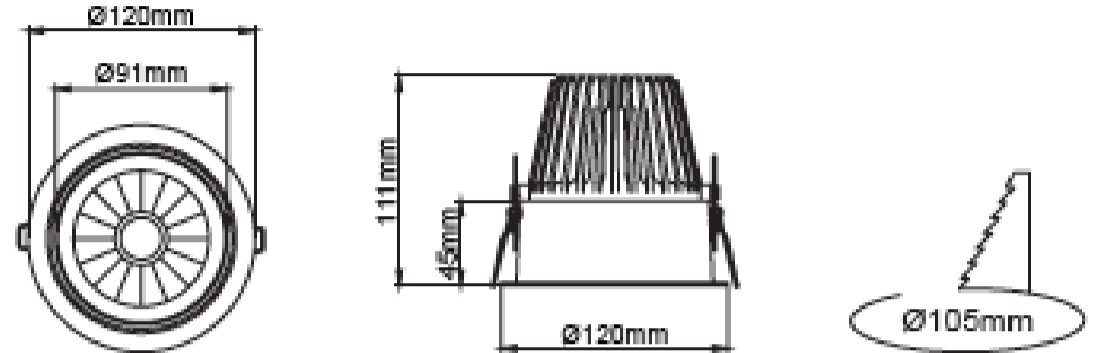

Electrical Parameters

Base Model No.:	LL.I01.MLR.17025
Led Type:	Bridgelux (01), Samsun (45)
Colours:	White, black, silver
Wattage:	23W
CCT:	2700K - 5000K
IP Rating:	IP 40
Beam Angle:	20°, 30°, 50°
CRI:	Ra+80

Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- Dimming option available upon request.
- Clear safety glass.
- Narrow, medium and wide beam angle options available.
- Honeycomb filter accessory available.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLR.17025.01-WH/3/50	23W	3000K	2350lm	White	50°
LL.I01.MLR.17025.01-WH/3.5/50	23W	3500K	2425lm	White	50°
LL.I01.MLR.17025.01-WH/4/50	23W	4000K	2500lm	White	50°
LL.I01.MLR.17025.01-GR/3/50	23W	3000K	2350lm	Grey	50°
LL.I01.MLR.17025.01-GR/3.5/50	23W	3500K	2425lm	Grey	50°
LL.I01.MLR.17025.01-GR/4/50	23W	4000K	2500lm	Grey	50°
LL.I01.MLR.17025.01-BL/3/50	23W	3000K	2350lm	Black	50°
LL.I01.MLR.17025.01-BL/3.5/50	23W	3500K	2425lm	Black	50°
LL.I01.MLR.17025.01-BL/4/50	23W	4000K	2500lm	Black	50°