


Inara Bridgespot Batwing

AVOLUX®

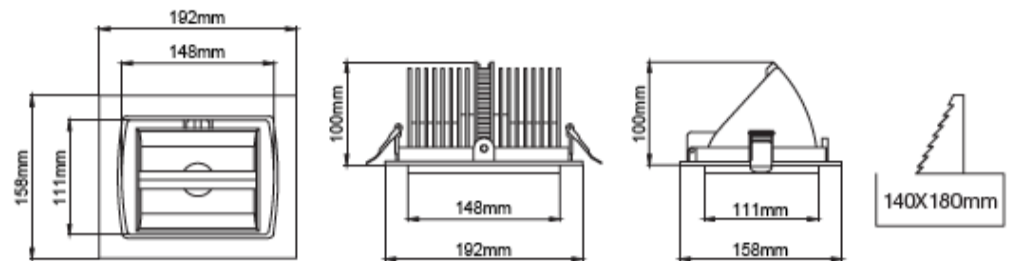

Electrical Parameters

Base Model No.:	LL.I01.MLR.40238
Led Type:	Bridgelux (01)
Colours:	White, black, silver
Wattage:	42W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	2x25°, 2x45°
CRI:	Ra+80, Ra+90

Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Clear safety glass.
- Narrow and medium batwing beam angle options available.
- Emergency kit system can be integrated.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLR.40238-WH/3/2x45	42W	3000K	4350lm	White	2x45°
LL.I01.MLR.40238-WH/3.5/2x45	42W	3500K	4425lm	White	2x45°
LL.I01.MLR.40238-WH/4/2x45	42W	4000K	4550lm	White	2x45°
LL.I01.MLR.40238-GR/3/2x45	42W	3000K	4350lm	Grey	2x45°
LL.I01.MLR.40238-GR/3.5/2x45	42W	3500K	4425lm	Grey	2x45°
LL.I01.MLR.40238-GR/4/2x45	42W	4000K	4550lm	Grey	2x45°
LL.I01.MLR.40238-BL/3/2x45	42W	3000K	4350lm	Black	2x45°
LL.I01.MLR.40238-BL/3.5/2x45	42W	3500K	4425lm	Black	2x45°
LL.I01.MLR.40238-BL/4/2x45	42W	4000K	4550lm	Black	2x45°