


Inara Bridgespot Half Batwing

AVOLUX®

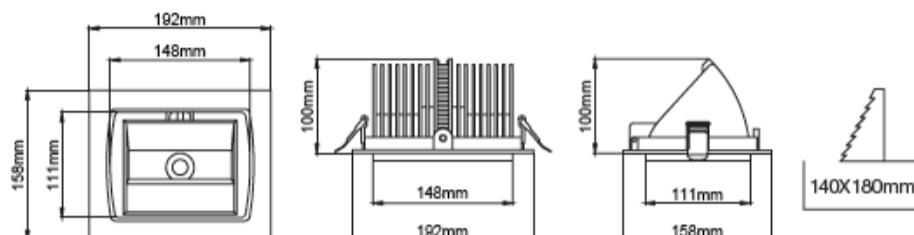

42w

2700K-
5000K

Ra+80
Ra+90

IP20



Electrical Paramaters

Base Model No.:	LL.I01.MLR.40237
Led Type:	Bridgelux (01)
Colours:	White, black, silver
Wattage:	42W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	1x45°
CRI:	Ra+80, Ra+90

Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Clear safety glass.
- Narrow and medium batwing beam angle options available.
- Emergency kit system can be integrated.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLR.40237-WH/3/1x45	42W	3000K	4350lm	White	1x45°
LL.I01.MLR.40237-WH/3.5/1x45	42W	3500K	4425lm	White	1x45°
LL.I01.MLR.40237-WH/4/1x45	42W	4000K	4550lm	White	1x45°
LL.I01.MLR.40237-GR/3/1x45	42W	3000K	4350lm	Grey	1x45°
LL.I01.MLR.40237-GR/3.5/1x45	42W	3500K	4425lm	Grey	1x45°
LL.I01.MLR.40237-GR/4/1x45	42W	4000K	4550lm	Grey	1x45°
LL.I01.MLR.40237-BL/3/1x45	42W	3000K	4350lm	Black	1x45°
LL.I01.MLR.40237-BL/3.5/1x45	42W	3500K	4425lm	Black	1x45°
LL.I01.MLR.40237-BL/4/1x45	42W	4000K	4550lm	Black	1x45°