
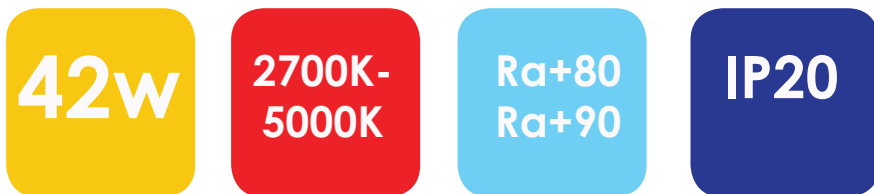


# Inara Bridgespot Oval

AVOLUX®

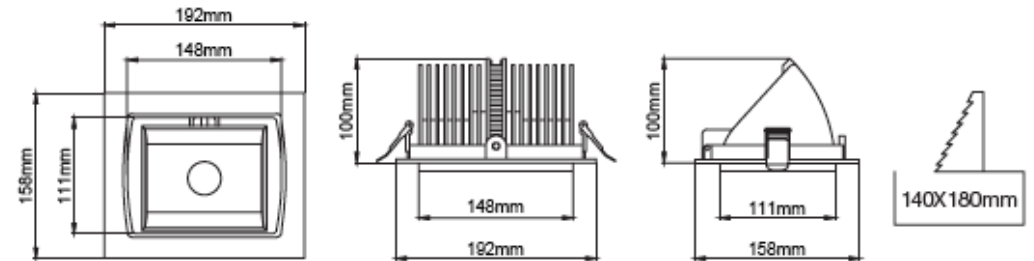

## Electrical Parameters

<b>Base Model No.:</b>	<b>LL.I01.MLR.40239</b>
Led Type:	Bridgelux (01)
Colours:	White, black, silver
Wattage:	42W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	40°, 80°
CRI:	Ra+80, Ra+90

## Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Clear safety glass.
- Oval wide beam angle reflector.
- Emergency kit system can be integrated.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLR.40239-WH/3/80	42W	3000K	3250lm	White	80°
LL.I01.MLR.40239-WH/3.5/80	42W	3500K	3325lm	White	80°
LL.I01.MLR.40239-WH/4/80	42W	4000K	3400lm	White	80°
LL.I01.MLR.40239-GR/3/80	42W	3000K	3250lm	Grey	80°
LL.I01.MLR.40239-GR/3.5/80	42W	3500K	3325lm	Grey	80°
LL.I01.MLR.40239-GR/4/80	42W	4000K	3400lm	Grey	80°
LL.I01.MLR.40239-BL/3/80	42W	3000K	3250lm	Black	80°
LL.I01.MLR.40239-BL/3.5/80	42W	3500K	3325lm	Black	80°
LL.I01.MLR.40239-BL/4/80	42W	4000K	3400lm	Black	80°