


# Leila Downlight

AVOLUX®

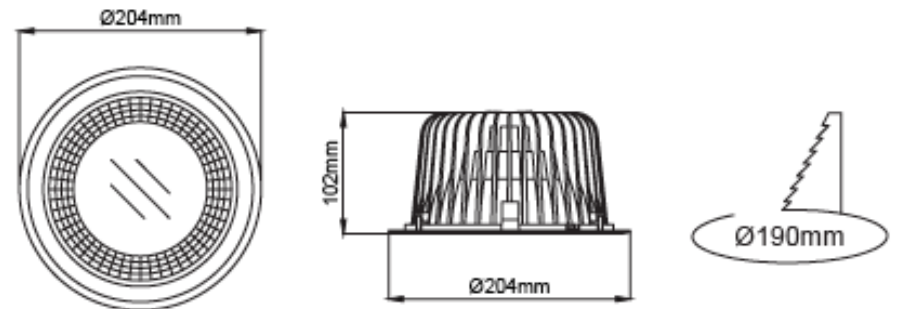

## Electrical Parameters

<b>Base Model No.:</b>	<b>LL.I02.PLR.15072</b>
Colours:	White, black, silver
Wattage:	23W
CCT:	2700K - 5000K
IP Rating:	IP 40
Beam Angle:	74°
CRI:	Ra+80

## Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- High efficient opal diffuser.
- Gold plated reflector option available upon request.
- IP44 rating possible with the integration of extra silicon gasket upon request.
- An emergency kit system can be integrated.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I02.PLR.15072-WH/3/74	23W	3000K	2000lm	White	74°
LL.I02.PLR.15072-WH/3.5/74	23W	3500K	2060lm	White	74°
LL.I02.PLR.15072-WH/4/74	23W	4000K	2120lm	White	74°
LL.I02.PLR.15072-GR/3/74	23W	3000K	2000lm	Grey	74°
LL.I02.PLR.15072-GR/3.5/74	23W	3500K	2060lm	Grey	74°
LL.I02.PLR.15072-GR/4/74	23W	4000K	2120lm	Grey	74°
LL.I02.PLR.15072-BL/3/74	23W	3000K	2000lm	Black	74°
LL.I02.PLR.15072-BL/3.5/74	23W	3500K	2060lm	Black	74°
LL.I02.PLR.15072-BL/4/74	23W	4000K	2120lm	Black	74°