


# Leila Maxi Downlight

AVOLUX®

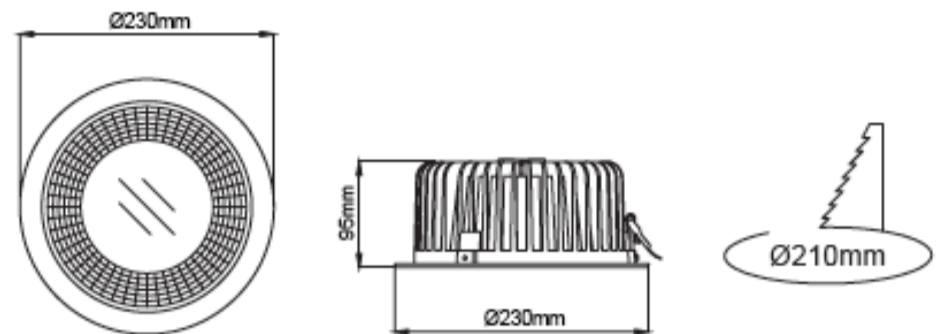

## Electrical Parameters

<b>Base Model No.:</b>	<b>LL.I02.PLR.15074</b>
Colours:	White, black, silver
Wattage:	30W
CCT:	2700K - 5000K
IP Rating:	IP 40
Beam Angle:	75°
CRI:	Ra+80

## Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Gold plated reflector option available upon request.
- IP44 rating possible with integration of extra silicon gasket upon request.
- Emergency kit system can be integrated.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I02.PLR.15074-WH/3/75	30W	3000K	2600lm	White	75°
LL.I02.PLR.15074-WH/3.5/75	30W	3500K	2662lm	White	75°
LL.I02.PLR.15074-WH/4/75	30W	4000K	2725lm	White	75°
LL.I02.PLR.15074-GR/3/75	30W	3000K	2600lm	Grey	75°
LL.I02.PLR.15074-GR/3.5/75	30W	3500K	2662lm	Grey	75°
LL.I02.PLR.15074-GR/4/75	30W	4000K	2725lm	Grey	75°
LL.I02.PLR.15074-BL/3/75	30W	3000K	2600lm	Black	75°
LL.I02.PLR.15074-BL/3.5/75	30W	3500K	2662lm	Black	75°
LL.I02.PLR.15074-BL/4/75	30W	4000K	2725lm	Black	75°