


Leila Midi Bridgespot

AVOLUX®

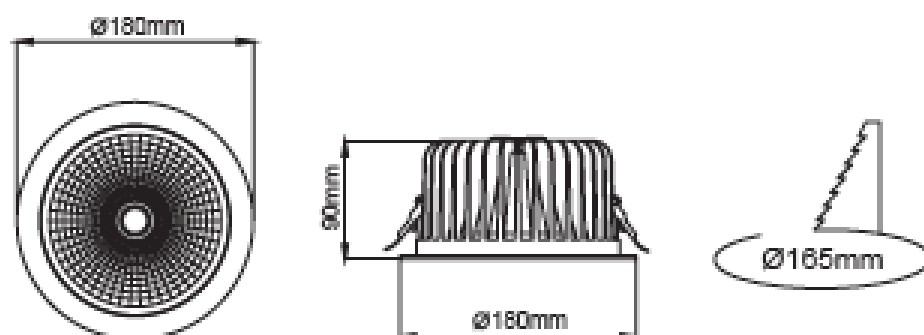

Electrical Parameters

Base Model No.:	LL.I01.MLR.15070
Colours:	White, black, silver
Wattage:	29W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	67°
CRI:	Ra+80, Ra+90

Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- High efficient opal diffuser.
- Wide beam angle 99.9% pure aluminium anodized reflector.
- Emergency kit system can be integrated.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLR.15070-WH/3/67	29W	3000K	3200lm	White	67°
LL.I01.MLR.15070-WH/3.5/67	29W	3500K	3350lm	White	67°
LL.I01.MLR.15070-WH/4/67	29W	4000K	3500lm	White	67°
LL.I01.MLR.15070-GR/3/67	29W	3000K	3200lm	Grey	67°
LL.I01.MLR.15070-GR/3.5/67	29W	3500K	3350lm	Grey	67°
LL.I01.MLR.15070-GR/4/67	29W	4000K	3500lm	Grey	67°
LL.I01.MLR.15070-BL/3/67	29W	3000K	3200lm	Black	67°
LL.I01.MLR.15070-BL/3.5/67	29W	3500K	3350lm	Black	67°
LL.I01.MLR.15070-BL/4/67	29W	4000K	3500lm	Black	67°