


# Leila Midi Downlight

AVOLUX®

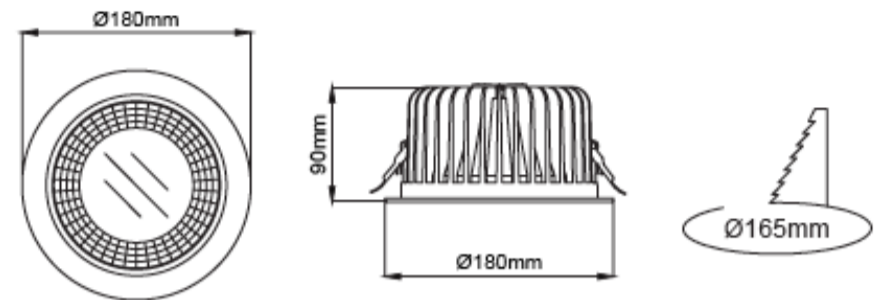

## Electrical Parameters

<b>Base Model No.:</b>	<b>LL.I02.PLR.15070</b>
Colours:	White, black, silver
Wattage:	15W
CCT:	2700K - 5000K
IP Rating:	IP 40
Beam Angle:	70°
CRI:	Ra+80

## Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- High efficient opal diffuser.
- Gold plated reflector option available upon request.
- IP44 rating possible with integration of extra silicon gasket upon request.
- Emergency kit system can be integrated.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I02.PLR.15070-WH/3/70	15W	3000K	1320lm	White	70°
LL.I02.PLR.15070-WH/3.5/70	15W	3500K	1360lm	White	70°
LL.I02.PLR.15070-WH/4/70	15W	4000K	1400lm	White	70°
LL.I02.PLR.15070-GR/3/70	15W	3000K	1320lm	Grey	70°
LL.I02.PLR.15070-GR/3.5/70	15W	3500K	1360lm	Grey	70°
LL.I02.PLR.15070-GR/4/70	15W	4000K	1400lm	Grey	70°
LL.I02.PLR.15070-BL/3/70	15W	3000K	1320lm	Black	70°
LL.I02.PLR.15070-BL/3.5/70	15W	3500K	1360lm	Black	70°
LL.I02.PLR.15070-BL/4/70	15W	4000K	1400lm	Black	70°