
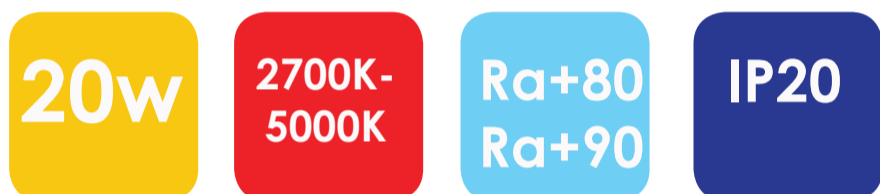


Leila Mini Bridgespot

AVOLUX®

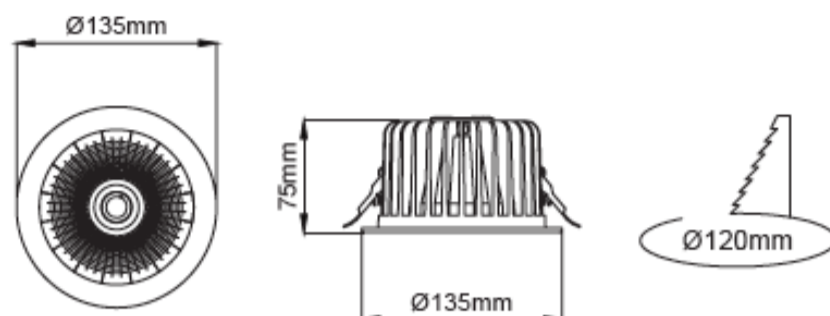

Electrical Parameters

Base Model No.:	LL.I01.MLR.15068
LED Manufacturer:	Cree (06)
Colours:	White, black, silver
Wattage:	20W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	60°
CRI:	Ra+80, Ra+90

Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Wide beam angle 99.9% pure aluminium anodized reflector.
- Emergency kit system can be integrated.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLR.15068-WH/3/60	20W	3000K	2000lm	White	60°
LL.I01.MLR.15068-WH/3.5/60	20W	3500K	2100lm	White	60°
LL.I01.MLR.15068-WH/4/60	20W	4000K	2200lm	White	60°
LL.I01.MLR.15068-GR/3/60	20W	3000K	2000lm	Grey	60°
LL.I01.MLR.15068-GR/3.5/60	20W	3500K	2100lm	Grey	60°
LL.I01.MLR.15068-GR/4/60	20W	4000K	2200lm	Grey	60°
LL.I01.MLR.15068-BL/3/60	20W	3000K	2000lm	Black	60°
LL.I01.MLR.15068-BL/3.5/60	20W	3500K	2100lm	Black	60°
LL.I01.MLR.15068-BL/4/60	20W	4000K	2200lm	Black	60°