
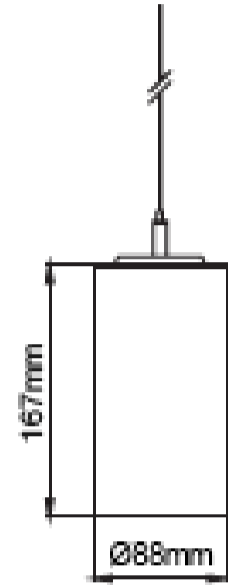


Pipa Midi Bridgespot Surface Mounted

AVOLUX®



Electrical Paramaters

| | |
|------------------------|-------------------------|
| Base Model No.: | LL.I01.MLP.17070 |
| Led Type: | Bridgelux (01) |
| Colours: | White, black, silver |
| Wattage: | 13W |
| CCT: | 2700K - 5000K |
| IP Rating: | IP 20 |
| Beam Angle: | 20°, 50° |
| CRI: | Ra+80 |

Features

- Aluminium profile body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Honeycomb filter accessory available.
- Steel suspension chain up to 5mt lenght option.

Specifications

| Model | Wattage | CCT | Lumens | Colour | Beam Angle |
|----------------------------|---------|-------|--------|--------|------------|
| LL.I01.MLP.17070-WH/3/50 | 13W | 3000K | 865lm | White | 50° |
| LL.I01.MLP.17070-WH/3.5/50 | 13W | 3500K | 882lm | White | 50° |
| LL.I01.MLP.17070-WH/4/50 | 13W | 4000K | 900lm | White | 50° |
| LL.I01.MLP.17070-GR/3/50 | 13W | 3000K | 865lm | Grey | 50° |
| LL.I01.MLP.17070-GR/3.5/50 | 13W | 3500K | 882lm | Grey | 50° |
| LL.I01.MLP.17070-GR/4/50 | 13W | 4000K | 900lm | Grey | 50° |
| LL.I01.MLP.17070-BL/3/50 | 13W | 3000K | 865lm | Black | 50° |
| LL.I01.MLP.17070-BL/3.5/50 | 13W | 3500K | 882lm | Black | 50° |
| LL.I01.MLP.17070--BL/4/50 | 13W | 4000K | 900lm | Black | 50° |