
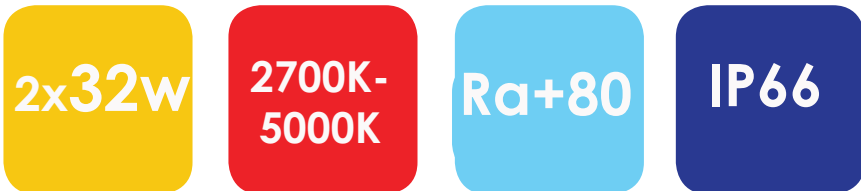


2x Koala Bridgespot

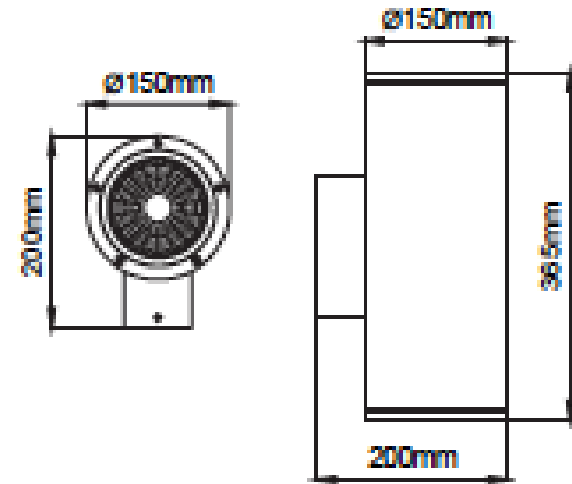

Electrical Parameters

Base Model No.:	LL.O07.WA.06030
Colours:	Light Grey, Black, Dark Grey
Wattage:	32W
CCT:	2700K - 5000K
IP Rating:	IP 66
Beam Angle:	20°, 30°, 50°
CRI:	Ra+80

Features

- Corrosion resistant die cast aluminium alloy.
- Thermal shock resistant safety glass.
- Weatherproof and durable silicone rubber gasket.
- Ultraviolet stabilized polyester powder coat finish in black, dark gray and light gray finish.
- Convenient to be used with COB led option.
- Designed for single-side light output.
- Luminaire can be installed in any burning position.
- All external screws are stainless steel.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.O07.WA.06030-LG/2.7/20	2x32W	2700K	2x3400lm	Light Grey	20°
LL.O07.WA.06030-LG/3/20	2x32W	3000K	2x3900lm	Light Grey	20°
LL.O07.WA.06030-LG/4/20	2x32W	4000K	2x4150lm	Light Grey	20°
LL.O07.WA.06030-LG/5/20	2x32W	5000K	2x4400lm	Light Grey	20°
LL.O07.WA.06030-B/2.7/30	2x32W	2700K	2x3400lm	Black	30°
LL.O07.WA.06030-B/3/30	2x32W	3000K	2x3900lm	Black	30°
LL.O07.WA.06030-B/4/30	2x32W	4000K	2x4150lm	Black	30°
LL.O07.WA.06030-B/5/30	2x32W	5000K	2x4400lm	Black	30°