


# Mini Lale Bridgespot

AVOLUX®

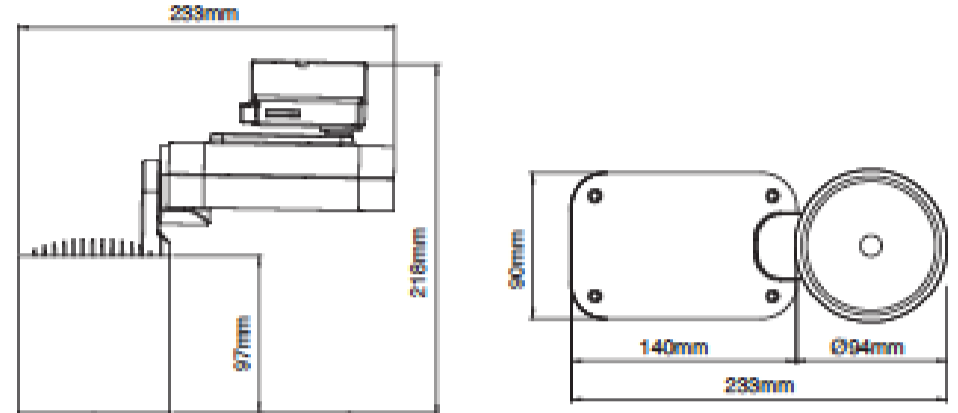

## Electrical Parameters

<b>Base Model No.:</b>	<b>LL.I01.MLT.31855</b>
Colours:	White, Black, Grey
Wattage:	27W
CCT:	2700K - 4000K
IP Rating:	IP 20
Beam Angle:	20°, 30°, 40°
CRI:	Ra+80, Ra+90

## Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Dimming option with integrated potentiometer.
- Clear safety glass.
- Honeycomb filter, barndoor, antiglare screen and visor accessories available.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLT.31855-WH/2/50	27W	2700K	2750lm	White	50°
LL.I01.MLT.31855-WH/3/50	27W	3000K	2900lm	White	50°
LL.I01.MLT.31855-WH/4/50	27W	4000K	3000lm	White	50°
LL.I01.MLT.31855-GR/2/50	27W	2700K	2750lm	Grey	50°
LL.I01.MLT.31855-GR/3/50	27W	3000K	2900lm	Grey	50°
LL.I01.MLT.31855-GR/4/50	27W	4000K	3000lm	Grey	50°
LL.I01.MLT.31855-BL/2/50	27W	2700K	2750lm	Black	50°
LL.I01.MLT.31855-BL/3/50	27W	3000K	2900lm	Black	50°
LL.I01.MLT.31855-BL/4/50	27W	4000K	3000lm	Black	50°