


Mini Lale Bridgespot

AVOLUX®

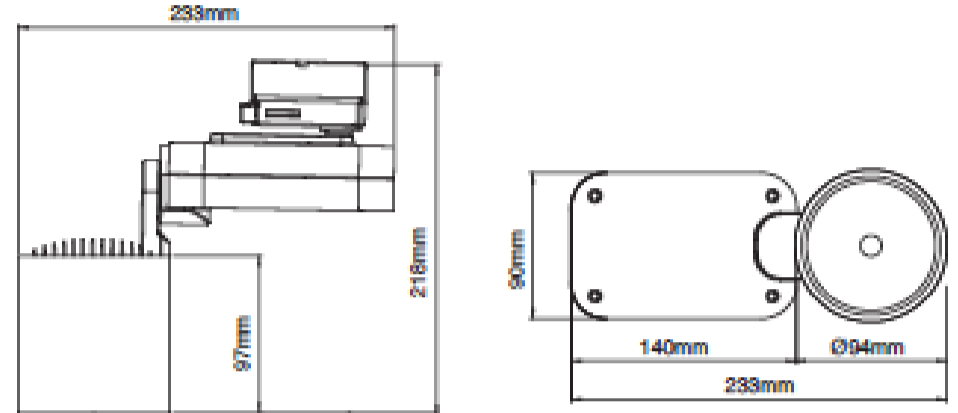

Electrical Parameters

Base Model No.:	LL.I01.MLT.31855
Colours:	White, Black, Grey
Wattage:	23W
CCT:	3000K - 5000K
IP Rating:	IP 20
Beam Angle:	20°, 30°, 40°
CRI:	Ra+80, Ra+90

Features

- Die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Dimming option with integrated potentiometer.
- Clear safety glass.
- Honeycomb filter, barndoor, antiglare screen and visor accessories available.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLT.31855-WH/3/50	23W	3000K	2250lm	White	50°
LL.I01.MLT.31854-WH/4/50	23W	3500K	2350lm	White	50°
LL.I01.MLT.31855-WH/5/50	23W	4000K	2400lm	White	50°
LL.I01.MLT.31855-GR/3/50	23W	3000K	2250lm	Grey	50°
LL.I01.MLT.31855-GR/4/50	23W	3500K	2350lm	Grey	50°
LL.I01.MLT.31855-GR/5/50	23W	4000K	2400lm	Grey	50°
LL.I01.MLT.31855-BL/3/50	23W	3000K	2250lm	Black	50°
LL.I01.MLT.31855-BL/4/50	23W	3500K	2350lm	Black	50°
LL.I01.MLT.31855-BL/5/50	23W	4000K	2400lm	Black	50°