


Panda Midi Spike Mount

AVOLUX®

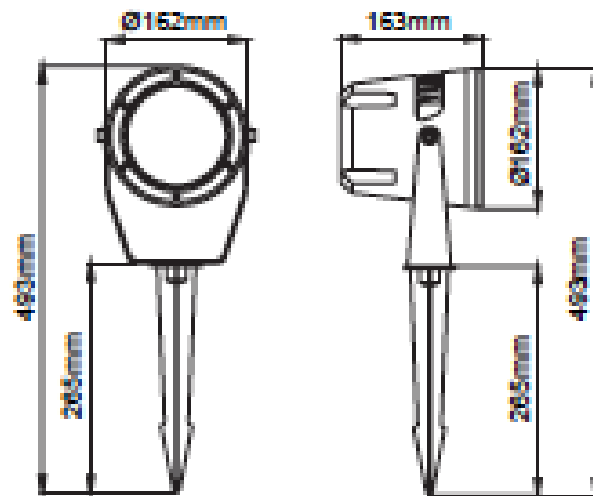

20w

3000K -
6000K

Ra+80

IP66



Electrical Paramaters

Base Model No.:	LL.O07.WL.00525
Colours:	Light Grey, Dark Grey, Black
Wattage:	40W
CCT:	3000K - 6000K, Red, Green, Blue and Amber
IP Rating:	IP 66
Beam Angle:	6°, 25°, 55°
CRI:	Ra+80

Features

- Corrosion resistant die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Can be used Power Leds.
- Clever thermal design.
- Narrow, medium and wide beam angles available.
- Led colour temperatures optionally 3000K, 4000K and 6000K.
- Alternatively blue, green, red and amber options available.
- Suitable for illumination up to 9-12 meter height.

Specifications

Model	Wattage	CCT	Lumens	Beam Angle	Color
LL.O07.WL.00525-LG/3/6	40W	3000K	4400lm	6°	Light Grey
LL.O07.WL.00525-LG/4/6	40W	4000K	4700lm	6°	Light Grey
LL.O07.WL.00525-LG/6/6	40W	6000K	5000lm	6°	Light Grey
LL.O07.WL.00525-LG/R/6	32W	Red	2040lm	6°	Light Grey
LL.O07.WL.00525-LG/G/6	43W	Green	2570lm	6°	Light Grey
LL.O07.WL.00525-LG/B/6	41W	Blue	1165lm	6°	Light Grey
LL.O07.WL.00525-LG/A/6	32W	Amber	1200lm	6°	Light Grey