


Panda Midi Surface Mount

AVOLUX®

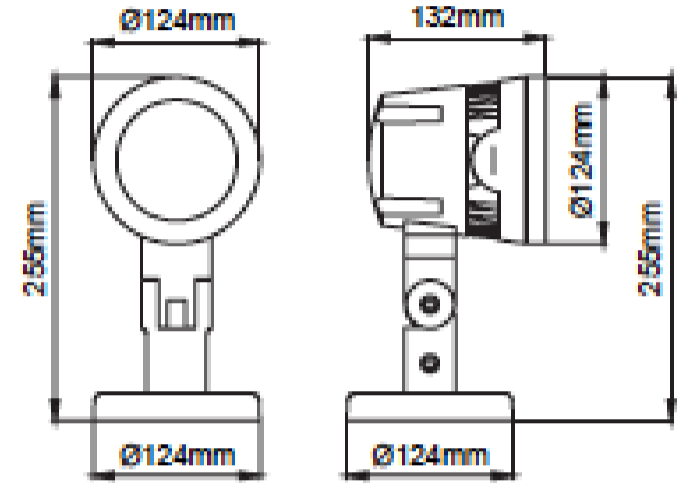

20w

3000K -
6000K

Ra+80

IP66



Electrical Parameters

Base Model No.:	LL.O07.WL.00521
Colours:	Light Grey, Dark Grey, Black
Wattage:	20W
CCT:	3000K - 6000K, Red, Green, Blue and Amber
IP Rating:	IP 66
Beam Angle:	6°, 25°, 55°
CRI:	Ra+80

Features

- Corrosion resistant die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Can be used Power Leds.
- Clever thermal design.
- Narrow, medium and wide beam angles available.
- Led colour temperatures optionally 3000K, 4000K and 6000K.
- Alternatively blue, green, red and amber options available.
- Suitable for illumination up to 12-15 meter height.

Specifications

Model	Wattage	CCT	Lumens	Beam Angle	Color
LL.O07.WL.00521-LG/3/6	20W	3000K	2200lm	6°	Light Grey
LL.O07.WL.00521-LG/4/6	20W	4000K	2350lm	6°	Light Grey
LL.O07.WL.00521-LG/6/6	20W	6000K	2500lm	6°	Light Grey
LL.O07.WL.00521-LG/R/6	16W	Red	1020lm	6°	Light Grey
LL.O07.WL.00521-LG/G/6	22W	Green	1285lm	6°	Light Grey
LL.O07.WL.00521-LG/B/6	21W	Blue	585lm	6°	Light Grey
LL.O07.WL.00521-LG/A/6	16W	Amber	600lm	6°	Light Grey