
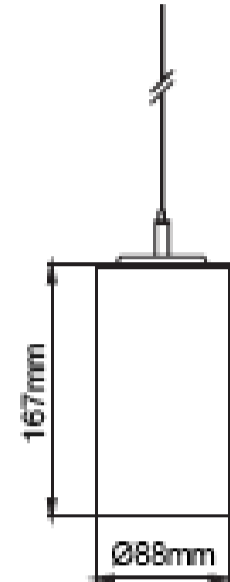


Pipa Midi Bridgespot Pendant

AVOLUX®



Electrical Parameters

Base Model No.:	LL.I01.MLP.17070
Led Type:	Bridgelux (01)
Colours:	White, black, silver
Wattage:	13W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	20°, 50°
CRI:	Ra+80

Features

- Aluminium profile body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Honeycomb filter accessory available.
- Steel suspension chain up to 5mt length option.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLP.17070-WH/3/50	13W	3000K	865lm	White	50°
LL.I01.MLP.17070-WH/3.5/50	13W	3500K	882lm	White	50°
LL.I01.MLP.17070-WH/4/50	13W	4000K	900lm	White	50°
LL.I01.MLP.17070-GR/3/50	13W	3000K	865lm	Grey	50°
LL.I01.MLP.17070-GR/3.5/50	13W	3500K	882lm	Grey	50°
LL.I01.MLP.17070-GR/4/50	13W	4000K	900lm	Grey	50°
LL.I01.MLP.17070-BL/3/50	13W	3000K	865lm	Black	50°
LL.I01.MLP.17070-BL/3.5/50	13W	3500K	882lm	Black	50°
LL.I01.MLP.17070-BL/4/50	13W	4000K	900lm	Black	50°