
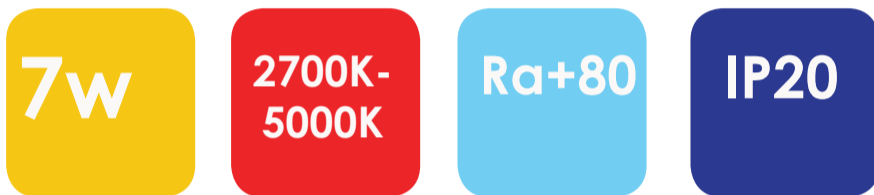
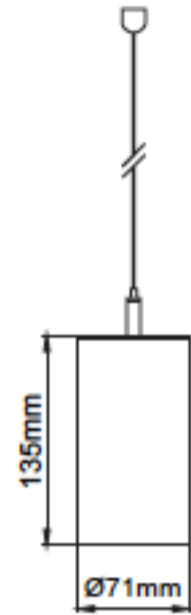


# Pipa Mini Bridgespot Suspended

AVOLUX®



## Electrical Paramaters

<b>Base Model No.:</b>	<b>LL.I01.MLS.17080</b>
Led Type:	Bridgelux (01)
Colours:	White, black, silver
Wattage:	7W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	30°
CRI:	Ra+80

## Features

- Aluminium profile body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Steel suspension chain up to 5mt lenght option.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLS.17080-WH/3/30	7W	3000K	865lm	White	30°
LL.I01.MLS.17080-WH/3.5/30	7W	3500K	882lm	White	30°
LL.I01.MLS.17080-WH/4/30	7W	4000K	900lm	White	30°
LL.I01.MLS.17080-GR/3/30	7W	3000K	865lm	Grey	30°
LL.I01.MLS.17080-GR/3.5/30	7W	3500K	882lm	Grey	30°
LL.I01.MLS.17080-GR/4/30	7W	4000K	900lm	Grey	30°
LL.I01.MLS.17080-BL/3/30	7W	3000K	865lm	Black	30°
LL.I01.MLS.17080-BL/3.5/30	7W	3500K	882lm	Black	30°
LL.I01.MLS.17080-BL/4/30	7W	4000K	900lm	Black	30°