


# Rainbow

AVOLUX®

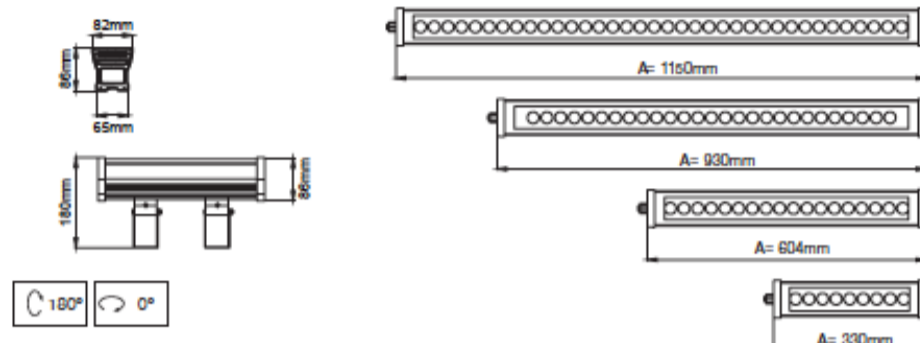

## Electrical Parameters

<b>Base Model No.:</b>	<b>LL.O07.WL.16020</b>
Colours:	Light Grey, Black, Dark Grey
Wattage:	7 - 40W
CCT:	3000K - 6000K, Red, Green, Blue and Amber
IP Rating:	IP 66
Beam Angle	6°, 25°, 55°
CRI:	Ra+80
Length:	330mm, 604mm, 930mm, 1150mm

## Features

- Corrosion resistant aluminium extruded body.
- Only to be used with electronicLed driver.
- Mains voltage: 220-240V / 50-60Hz.
- Cree XPG2 Led.
- Clever thermal design.
- Narrow, medium and wide beam angles available.
- Led colour temperatures optionally 3000K, 4000K and 6000K.
- Suitable for illumination up to 10 meter height.
- It can be assembled both wall and ceiling with adjustable mounting legs.

## Specifications

Model	Wattage	CCT/ Color	Lumens	Length
LL.O07.WL.16020-330/3K	9.5W	3000K	1212lm	330mm
LL.O07.WL.16020-330/4K	9.5W	4000K	1296lm	330mm
LL.O07.WL.16020-330/6K	9.5W	6000K	1380lm	330mm
LL.O07.WL.16020-330/R	7W	Red	548lm	330mm
LL.O07.WL.16020-330/G	10W	Green	852lm	330mm
LL.O07.WL.16020-330/B	9.75W	Blue	350lm	330mm
LL.O07.WL.16020-330/A	7W	Amber	371lm	330mm
LL.O07.WL.16020-604/3K	19W	3000K	2424lm	604mm
LL.O07.WL.16020-604/4K	19W	4000K	2592lm	604mm
LL.O07.WL.16020-604/6K	19W	6000K	2760lm	604mm
LL.O07.WL.16020-604/R	14W	Red	1096lm	604mm
LL.O07.WL.16020-604/G	20W	Green	1704lm	604mm
LL.O07.WL.16020-604/B	19.5W	Blue	700lm	604mm
LL.O07.WL.16020-604/A	14W	Amber	742lm	604mm