


Flamingo Highbay with 105W



AVOLUX®

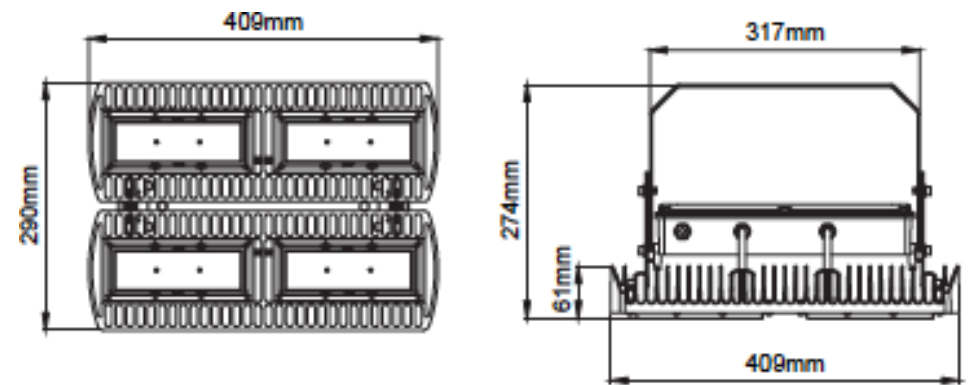

105W

3000K-
5000K

Ra+80

IP66



Electrical Paramaters

Base Model No.:	LL.O07.WL.17202
Colours:	Black, Textured Metallic Dark Grey
Wattage:	105W
CCT:	3000K - 5000K
IP Rating:	IP 66
Beam Angle:	30°, 60°, 90°
CRI:	Ra+80

Features

- Corrosion resistant die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Can be used Cree XPG2 Led.
- Clever thermal design.
- 105lm/W system efficiency.
- Led colour temperatures optionally 3000K, 4000K and 5000K.
- Suitable for illumination up to 4-8 meter height.
- Dali control option available.
- Easy mounting possibility with mounting bracket.
- Reliable system with L80 B10 lifetime parameters.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.O07.WL.17202/3KB30	105W	3000K	11250lm	Black	30°
LL.O07.WL.17202/4KB30	105W	4000K	11738lm	Black	30°
LL.O07.WL.17202/5KB30	105W	5000K	12200lm	Black	30°
LL.O07.WL.17202/3KDG30	105W	3000K	11250lm	Dark Grey	30°
LL.O07.WL.17202/4KDG30	105W	4000K	11738lm	Dark Grey	30°
LL.O07.WL.17202/5KDG30	105W	5000K	12200lm	Dark Grey	30°