


Herkul PR

AVOLUX®

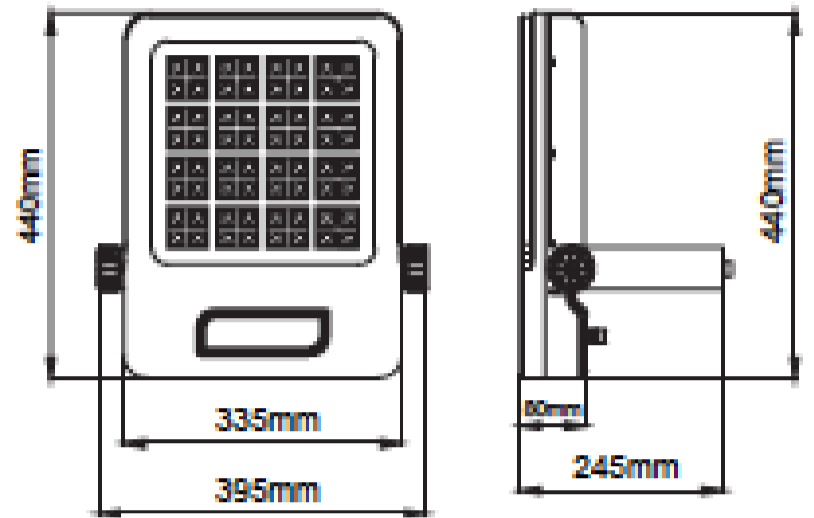

Electrical Parameters

Base Model No.:	LL.O07.WL.16930
Colours:	Black, Textured Metallic Dark Grey
Wattage:	100 - 183 W
CCT:	2700K - 6000K
IP Rating:	IP 66
Beam Angle:	20°, 36°, 69°
CRI:	Ra+80

Features

- Direct lighting luminaire for use with LEDs.
- Corrosion resistant die-cast aluminium body.
- Installation with bracket on surface and floor.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- Narrow, medium and wide beam angles available.
- Led colour temperatures optionally 2700K, 3000K, 4000K and 6000K.
- Suitable for illumination up to 25 meter height.
- 2 cable entries for through-wiring of mains supply cable.
- Internal silicon gaskets ensure IP protection.
- RGB and dynamic white tuning versions available upon request.
- All external screws are stainless steel.

Specifications

Model	Wattage	CCT	Lumens	LED Type
LL.O07.WL.16930-100W2k	100W	2700K	12940lm	Cree (06)
LL.O07.WL.16930-100W3k	100W	3000K	13480lm	Cree (06)
LL.O07.WL.16930-100W4k	100W	4000K	14042lm	Cree (06)
LL.O07.WL.16930-100W6k	100W	6000K	14600lm	Cree (06)
LL.O07.WL.16930-142W2k	142W	2700K	17425lm	Cree (06)
LL.O07.WL.16930-142W3k	142W	3000K	18150lm	Cree (06)
LL.O07.WL.16930-142W4k	142W	4000K	18905lm	Cree (06)
LL.O07.WL.16930-142W6k	142W	6000K	19660lm	Cree (06)
LL.O07.WL.16930-183W2k	183W	2700K	21000lm	Cree (06)
LL.O07.WL.16930-183W3k	183W	3000K	21890lm	Cree (06)
LL.O07.WL.16930-183W4k	183W	4000K	22800lm	Cree (06)
LL.O07.WL.16930-183W6k	183W	6000K	23712lm	Cree (06)