



Atlas Mix Round Downlight

DOXIS
LIGHTING FACTORY



Air circulation notice:

Do not topload with insulation materials

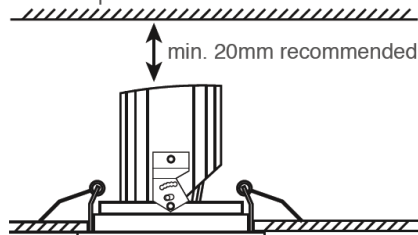

20 & 30w

2700K-5000K

Ra 90



Electrical Paramaters


Base Model No.:	1032
Power:	700mA(20.1w) & 1050mA (30w)
Forward Voltage:	700mA: 27.3V(min), 29.5V(typ), 31.7V(max) 1050mA: 26.6V(min), 28.7V(typ), 30.9V(max)
Colours:	Grey, Black, White, Chrome, Gold, Anthracite
LED Type:	Biridgelux Vero 18
CCT:	2700K - 4000K
Beam Angle:	22°, 45°, 58°
CRI:	Ra 80-90
SDCM:	3
Size:	125mm (h) x 120mm (d)

Features

- Aluminium profile body.
- Only to be used with electronic ballast and LED driver.
- Driver to be ordered separately.
- Dimmable options available.
- Adjustable recessed downlight.
- 5 year Bridgelux warranty on Bridgelux LEDs*

*Terms and Conditions Apply. Please ask for full details.

Colour Options:

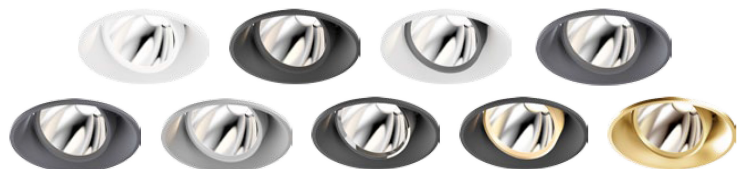

Specifications

Model	mA	Beam Angle	CRI	CCT	Lumens	Colour
1032.7.22.927.WH	700	22°	90	2700K	1798lm	White
1032.7.22.830.WH	700	22°	80	3000K	2314lm	White
1032.7.22.930.WH	700	22°	90	3000K	1866lm	White
1032.7.22.840.WH	700	22°	80	4000K	2457lm	White
1032.7.22.A30.WH	700	22°	Class A	3000K	1777lm	White