


FlatLED T2 Downlight

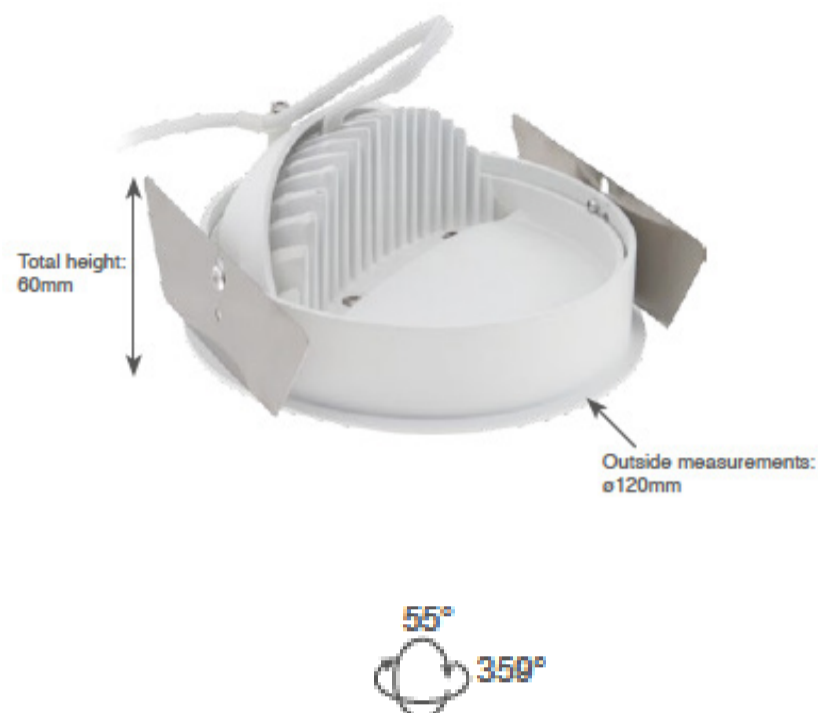

13W

**2700K -
3000K**

**Ra+80
Ra+90**

IP20




Electrical Paramaters

Base Model No.:	LL.466.24
LED Module:	Bridgelux ES Rectangle LED
Colours:	Several options
Wattage:	14.7W, 10.3W
Beam Angle:	24°, 32°
CCT:	2700K - 3000K
IP Rating:	Class III, IP 20
CRI:	Ra+80, Ra+90
Cutout Size:	114mm

Features

- High efficiency LED Downlight, equipped with a Bridgelux chip-on-board LED.
- Aluminium die-casted, compact design.
- High Quality components.
- Standard colors are white and black, other RAL colours are on demand.
- Very long lifetime (L70B50 +50000hrs)
- High efficiency LED with various possibilities
- High Lumen output
- Ra80 or Ra90 and great color consistency
- Tilt of 55 degrees
- Small build-in depth.

Colours

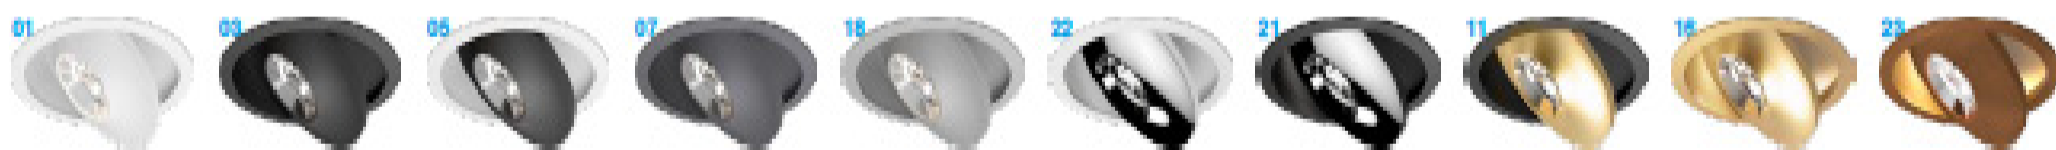

Specifications

Model	Wattage	CCT/CRI	500mA Lumens	Colour	Beam Angle
LL.466.24.827.01	14.7W	2700K - Ra80	1420 lm	White Matt	24°
LL.466.24.927.01	14.7W	2700K - Ra90	1200 lm	White Matt	24°
LL.466.24.830.01	14.7W	3000K - Ra80	1540 lm	White Matt	24°
LL.466.24.930.01	14.7W	3000K - Ra90	1310 lm	White Matt	24°