


# Koala Midi Surface Bridgespot

AVOLUX®

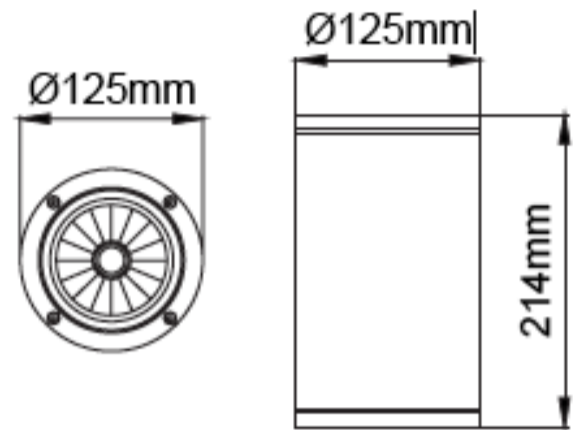

23W

2000K-5000K

Ra+80

IP66



## Electrical Parameters

<b>Base Model No.:</b>	<b>LL.O07.SM.06030</b>
Colours:	Light Grey, Dark Grey, Black
Wattage:	23W
CCT:	2700K - 5000K
IP Rating:	IP 66
Beam Angle:	20°, 30°, 50°
CRI:	Ra+80

## Features

- Corrosion resistant die cast aluminium alloy.
- Thermal shock resistant safety glass.
- Weatherproof and durable silicone rubber gasket.
- Ultraviolet stabilized polyester powder coat finish in black, dark gray and light gray finish.
- Convenient to be used with COB led option.
- All external screws are stainless steel.
- Separate base plate available for easy mounting.
- Outer frame is fixed to main body with stainless steel screws.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.O07.SM.06030-WH/3/50	23W	3000K	2250lm	White	50°
LL.O07.SM.06030-WH/3.5/50	23W	3500K	2300lm	White	50°
LL.O07.SM.06030-WH/4/50	23W	4000K	2350lm	White	50°
LL.O07.SM.06030-GR/3/50	23W	3000K	2250lm	Grey	50°
LL.O07.SM.06030-GR/3.5/50	23W	3500K	2300lm	Grey	50°
LL.O07.SM.06030-GR/4/50	23W	4000K	2350lm	Grey	50°
LL.O07.SM.06030-BL/3/50	23W	3000K	2250lm	Black	50°
LL.O07.SM.06030-BL/3.5/50	23W	3500K	2300lm	Black	50°
LL.O07.SM.06030--BL/4/50	23W	4000K	2350lm	Black	50°