


Linear LED 65 Recessed

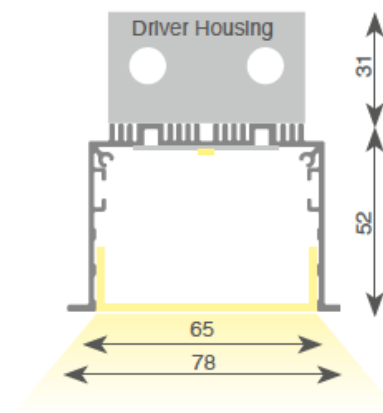

Electrical Paramaters

Base Model No.:	LL.2005.DT
LED Module:	Phillips LED strips
Colours:	Matt White, Matt Grey, Matt Black, Matt Anthracite, Aluminium Anodised
Wattage:	12.3W - 56W
CCT:	3000K - 4000K
CRI:	Ra+80

Specifications

Model	Difusser	Wattage	CCT	Lumens	Colour	Lenght
LL.2005.DT.830.2200-R/WM/O	Opal	14.5W	3000K	2200 lm	White Matt	563 mm
LL.2005.DT.840.2200-R/WM/O	Opal	14.5W	4000K	2200 lm	White Matt	563 mm
LL.2005.DT.830.2200-R/WM/P	Prismatic	14.5W	3000K	2200 lm	White Matt	563 mm
LL.2005.DT.840.2200-R/WM/P	Prismatic	14.5W	4000K	2200 lm	White Matt	563 mm
LL.2005.DT.830.3300-R/WM/O	Opal	21.7W	3000K	3300 lm	White Matt	845 mm
LL.2005.DT.840.3300-R/WM/O	Opal	21.7W	4000K	3300 lm	White Matt	845 mm
LL.2005.DT.830.3300-R/WM/P	Prismatic	21.7W	3000K	3300 lm	White Matt	845 mm
LL.2005.DT.840.3300-R/WM/P	Prismatic	21.7W	4000K	3300 lm	White Matt	845 mm
LL.2002.DT.830.4400-R/WM/O	Opal	29W	3000K	4400 lm	White Matt	1126 mm
LL.2005.DT.840.4400-R/WM/O	Opal	29W	4000K	4400 lm	White Matt	1126 mm
LL.2005.DT.830.4400-R/WM/P	Prismatic	29W	3000K	4400 lm	White Matt	1126 mm
LL.2005.DT.840.4400-R/WM/P	Prismatic	29W	4000K	4400 lm	White Matt	1126 mm
LL.2005.DT.830.5500-R/WM/O	Opal	36.2W	3000K	5500 lm	White Matt	1426 mm
LL.2005.DT.840.5500-R/WM/O	Opal	36.2W	4000K	5500 lm	White Matt	1426 mm
LL.2005.DT.830.5500-R/WM/P	Prismatic	36.2W	3000K	5500 lm	White Matt	1426 mm
LL.2005.DT.840.5500-R/WM/P	Prismatic	36.2W	4000K	5500 lm	White Matt	1426 mm
LL.2005.DT.830.6600-R/WM/O	Opal	43.5W	3000K	6600 lm	White Matt	1689 mm
LL.2005.DT.840.6600-R/WM/O	Opal	43.5W	4000K	6600 lm	White Matt	1689 mm
LL.2005.DT.830.6600-R/WM/P	Prismatic	43.5W	3000K	6600 lm	White Matt	1689 mm
LL.2005.DT.840.6600-R/WM/P	Prismatic	43.5W	4000K	6600 lm	White Matt	1689 mm

Features

- Square aluminium extruded profile 65x68mm.
- Strong attention is given to thermal management (reduction of heat).
- Equal light distribution and glare reduction (Prismatic Optics).
- Latest and best performing LED lighting technology using Philips LED Lines.
- Dimming options: 1-10V and Touch & Dali.
- Modules options : Down and single/double.
- More CCT and lenght on request.