


Titan 200

Surface Mounted

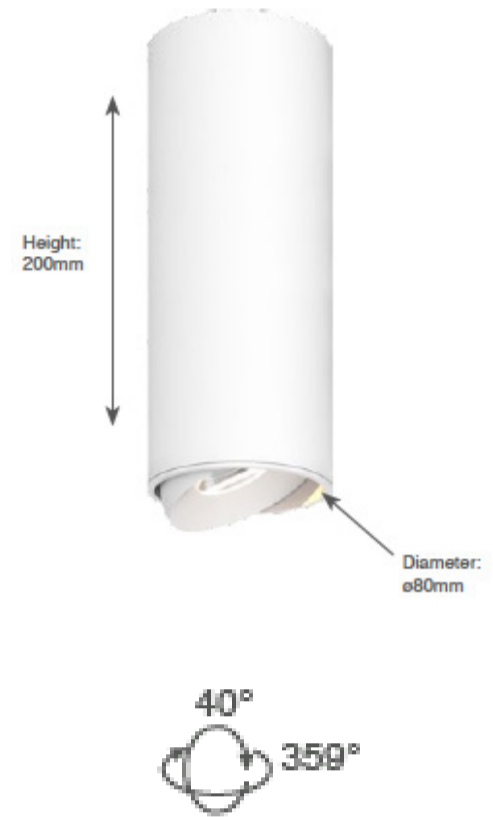

9.3W

2700K - 4000K

**Ra+80
Ra+90**

IP20



Electrical Parameters

| | |
|------------------------|-----------------------|
| Base Model No.: | LL.1214.90 |
| LED Module: | Bridgelux Vero 10 LED |
| Colours: | Several options |
| Wattage: | 9.3W |
| Beam Angle: | 28°, 40° |
| CCT: | 2700K - 3000K |
| IP Rating: | Class I, IP 20 |
| CRI: | Ra+80, Ra+90 |
| Cutout Size: | 60mm |

Features

- High efficiency LED downlight, surface mounted, equipped with a Bridgelux chip-on-board LED.
- Compact design with a tilt of 90 degrees.
- High Quality components.
- Available with wide beam or medium beam.
- Very long lifetime (L70B50 +50000hrs).
- High efficiency LED with many possibilities.
- High Lumen output.
- High CRI (>90) and great color consistency.
- Easy installation.
- Reflector variants: Cone, Organic and Anti-glare.
- Dimmable options: 1-10V, Dali, Main, Push

Colours



Specifications

| Model | Wattage | CCT/CRI | Lumens | Colour | Beam Angle |
|-----------------------|---------|--------------|--------|------------|------------|
| LL.1214.90.2700.28.01 | 9.3W | 2700K - Ra90 | 910 lm | White Matt | 28° |
| LL.1214.90.3000.28.01 | 9.3W | 3000K - Ra90 | 950 lm | White Matt | 28° |
| LL.1214.90.2700.40.01 | 9.3W | 2700K - Ra90 | 910 lm | White Matt | 40° |
| LL.1214.90.3000.40.01 | 9.3W | 3000K - Ra90 | 950 lm | White Matt | 40° |