


# Rayspot Bridgespot

AVOLUX®

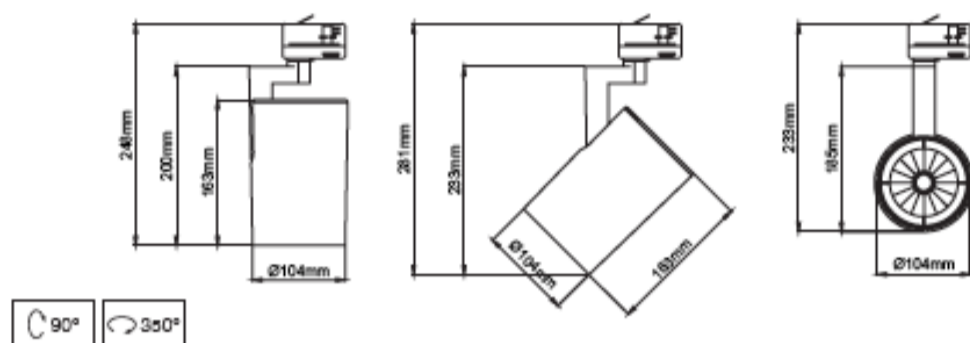

32w

2700K-5000K

Ra+80  
Ra+90

IP20



## Electrical Parameters

<b>Base Model No.:</b>	<b>LL.I01.MLT.18160</b>
LED Type:	Philips (39), Tridonic (44), Cree (06)
Colours:	White, black, silver
Wattage:	32W
CCT:	2700K - 5000K
IP Rating:	IP 20
Beam Angle:	20°, 30°, 40°
Driver Voltage:	24V
CRI:	Ra+80, Ra+90

## Features

- Die-cast aluminium body.
- Only to be used with electronic Led Driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- With 3-phase universal track adaptor.
- Dimming option with integrated potentiometer.
- Clear safety glass.
- Honeycomb filter, barndoor, antiglare screen and visor accessories available.

## Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.I01.MLT.18160-WH/3/40	32w	3000K	3900lm	White	40°
LL.I01.MLT.18160-WH/3.5/40	32w	3500K	4000lm	White	40°
LL.I01.MLT.18160-WH/4/40	32w	4000K	4150lm	White	40°
LL.I01.MLT.18160-GR/3/40	32w	3000K	3900lm	Grey	40°
LL.I01.MLT.18160-GR/3.5/40	32w	3500K	4000lm	Grey	40°
LL.I01.MLT.18160-GR/4/40	32w	4000K	4150lm	Grey	40°
LL.I01.MLT.18160-BL/3/40	32w	3000K	3900lm	Black	40°
LL.I01.MLT.18160-BL/3.5/40	32w	3500K	4000lm	Black	40°
LL.I01.MLT.18160-BL/4/40	32w	4000K	4150lm	Black	40°

EXPERIENCE  LUCE

Experience La Luce  
Ph: (02) 9698 8029 Fax: (02) 9698 8000  
admin@exluceluce.com.au  
www.exluceluce.com.au