


Koala Midi Bridgespot

AVOLUX®

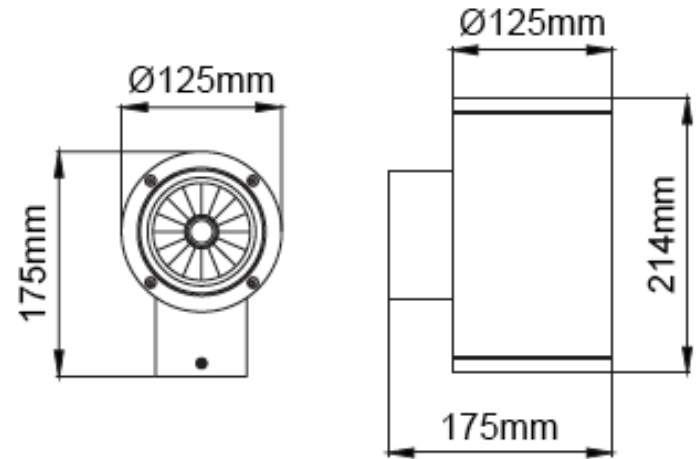

Electrical Parameters

Base Model No.:	LL.O07.WA.06035
Colours:	Light Grey, Dark Grey, Black
Wattage:	23W
CCT:	2700K - 5000K
IP Rating:	IP 66
Beam Angle:	20°, 30°, 40°
CRI:	Ra+80

Features

- Corrosion resistant die cast aluminium alloy.
- Thermal shock resistant safety glass.
- Weatherproof and durable silicone rubber gasket.
- Ultraviolet stabilized polyester powder coat finish in black, dark grey and light grey finish.
- Convenient to be used with COB led option.
- Designed for single-side light output.
- Luminaire can be installed in any burning position.
- All external screws are stainless steel.

Specifications

Model	Wattage	CCT	Lumens	Colour	Beam Angle
LL.O07.WA.06035-WH/3/40	23W	3000K	2250lm	White	40°
LL.O07.WA.06035-WH/3.5/40	23W	3500K	2300lm	White	40°
LL.O07.WA.06035-WH/4/40	23W	4000K	2350lm	White	40°
LL.O07.WA.06035-GR/3/40	23W	3000K	2250lm	Grey	40°
LL.O07.WA.06035-GR/3.5/40	23W	3500K	2300lm	Grey	40°
LL.O07.WA.06035-GR/4/40	23W	4000K	2350lm	Grey	40°
LL.O07.WA.06035-BL/3/40	23W	3000K	2250lm	Black	40°
LL.O07.WA.06035-BL/3.5/40	23W	3500K	2300lm	Black	40°
LL.O07.WA.06035--BL/4/40	23W	4000K	2350lm	Black	40°