


Kartal ST

AVOLUX®

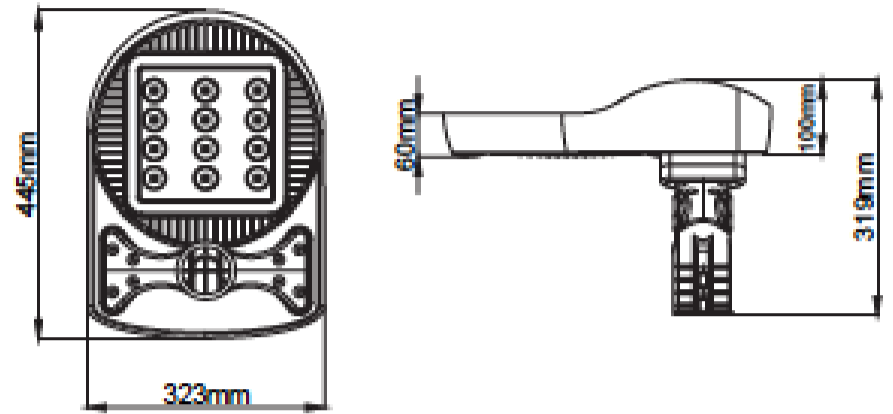

72 -
98 W

3000K -
4000K

Ra+80

IP66



Electrical Parameters

Base Model No.:	LL.O07.ST.16950
Colours:	Black, Textured Metallic Dark Grey
Wattage:	72W, 98W
CCT:	3000K - 4000K
IP Rating:	IP 66
Beam Angle	20°, 30°, 60°
CRI:	Ra+80

Features

- Street lighting system for use with LEDs.
- Corrosion resistant die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- High visual comfort.
- Suitable for illumination up to 3-4 meter pole height.
- High performance optics with symmetric light distribution.
- Pole-top installation on poles with ending part from Ø42 to Ø63 mm.
- Widely preferred in city landscapes, outdoor areas of shopping malls, hotels etc.

Specifications

Model	Wattage	CCT	Lumens	LED Type
LL.O07.ST.16950-72W3K	72W	3000K	7212lm	Philips Luxeon M
LL.O07.ST.16950-72W4K	72W	4000K	7212lm	Philips Luxeon M
LL.O07.ST.16950-98W3K	98W	3000K	10880lm	Philips Luxeon M
LL.O07.ST.16950-98W4K	98W	4000K	10880lm	Philips Luxeon M