


Magiclight

AVOLUX®

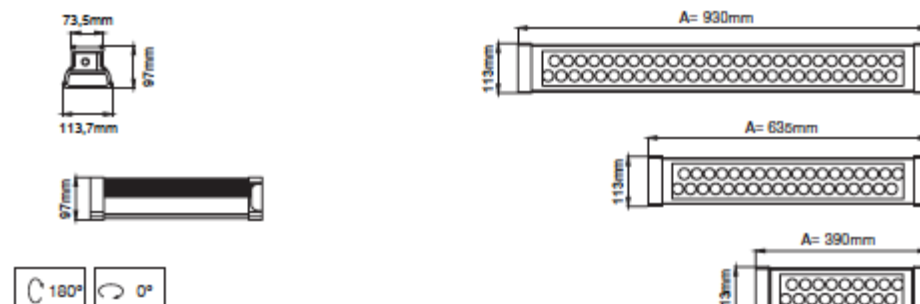

Electrical Paramaters

Base Model No.:	LL.O07.WL.16025
Colours:	Light Grey, Black, Dark Grey
Wattage:	14 - 60W
CCT:	3000K - 6000K, Red, Green, Blue and Amber
IP Rating:	IP 66
Beam Angle	6°, 25°, 55°
CRI:	Ra+80
Lenght:	390mm, 635mm, 930mm

Features

- Corrosion resistant aluminium extruded body.
- Only to be used with electronicLed driver.
- Mains voltage: 220-240V / 50-60Hz.
- Cree XPG2 Led.
- Clever thermal design.
- Narrow, medium and wide beam angles available.
- Led colour temperatures optionally 3000K, 4000K and 6000K.
- Suitable for illumination up to 20 meter height.
- It can be assembled both wall and ceiling with adjustable mounting legs.

Specifications

Model	Wattage	CCT/ Color	Lumens	Lenght
LL.O07.WL.16025-390/3K	19W	3000K	2424lm	390mm
LL.O07.WL.16025-390/4K	19W	4000K	2592lm	390mm
LL.O07.WL.16025-390/6K	19W	6000K	2760lm	390mm
LL.O07.WL.16025-390/R	14W	Red	1096lm	390mm
LL.O07.WL.16025-390/G	20W	Green	1704lm	390mm
LL.O07.WL.16025-390/B	19.50W	Blue	700lm	390mm
LL.O07.WL.16025-390/A	38W	Amber	742lm	390mm
LL.O07.WL.16025-635/3K	38W	3000K	4848lm	635mm
LL.O07.WL.16025-635/4K	38W	4000K	5184lm	635mm
LL.O07.WL.16025-635/6K	28W	6000K	5520lm	635mm
LL.O07.WL.16025-635/R	28W	Red	2192lm	635mm
LL.O07.WL.16025-635/G	40W	Green	3408lm	635mm
LL.O07.WL.16025-635/B	39W	Blue	1400lm	635mm
LL.O07.WL.16025-635/A	28W	Amber	1484lm	635mm