


Quartz

AVOLUX®

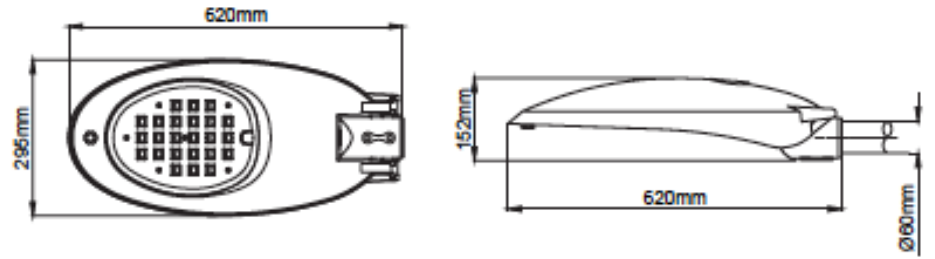

Electrical Parameters

Base Model No.:	LL.O07.ST.16300
Colours:	Dark Grey, Black
Wattage:	22 - 95W
CCT:	4000K
IP Rating:	IP 66
CRI:	Ra+80, Ra+70

Features

- Street lighting system for use with LEDs.
- Corrosion resistant die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Silver aluminium reflector on surface.
- Clever thermal design.
- High visual comfort.
- Suitable for illumination up to 4-9 meter pole height.
- High performance optics suitable for streetlighting standards.
- Replaceable driver unit and control gear with no tool requirement.
- 0°, 5°, 10° and 15° bracket adjustment possible.
- Pole-top installation on poles with ending part from Ø42 to Ø63mm.
- Driving current options of 350mA, 500mA and 700mA.

Specifications

Model	Wattage	CCT	Lumens	Height	Pole Distance	Color
LL.O07.ST.16300.V1-LG/22	22W	4000K	2843lm	4m	20m	Dark Grey
LL.O07.ST.16300.V2-LG/32	32W	4000K	3943lm	6m	26m	Dark Grey
LL.O07.ST.16300.V3-LG/47	47W	4000K	5400lm	6m	29m	Dark Grey
LL.O07.ST.16300.V4-LG/44	44W	4000K	5312lm	8m	30m	Dark Grey
LL.O07.ST.16300.V5-LG/66	66W	4000K	7409lm	8m	23m	Dark Grey
LL.O07.ST.16300.V6-LG/95	95W	4000K	9675lm	9m	27.5m	Dark Grey