


# Mini Hercul PR

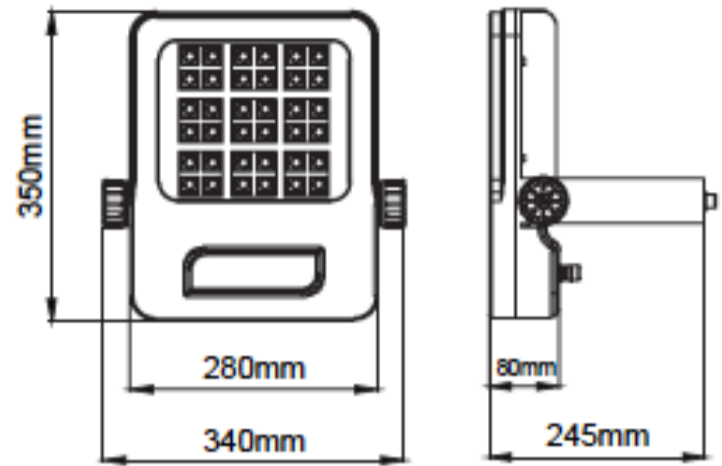

## Electrical Parameters

|                        |                                    |
|------------------------|------------------------------------|
| <b>Base Model No.:</b> | <b>LL.O07.WL.16935</b>             |
| Colours:               | Black, Textured Metallic Dark Grey |
| Wattage:               | 57 - 120 W                         |
| CCT:                   | 2700K - 6000K                      |
| IP Rating:             | IP 66                              |
| Beam Angle:            | 20°, 36°, 69°                      |
| CRI:                   | Ra+80                              |

## Features

- Direct lighting luminaire for use with LEDs.
- Corrosion resistant die-cast aluminium body.
- Installation with bracket on surface and floor.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- Narrow, medium and wide beam angles available.
- Led colour temperatures optionally 2700K, 3000K, 4000K and 6000K.
- Suitable for illumination up to 25 meter height.
- 2 cable entries for through-wiring of mains supply cable.
- Internal silicon gaskets ensure IP protection.
- RGB and dynamic white tuning versions available upon request.
- All external screws are stainless steel.

## Specifications

| Model                  | Wattage | CCT   | Lumens  | LED Type  |
|------------------------|---------|-------|---------|-----------|
| LL.O07.WL.16935-57W2k  | 57W     | 2700K | 7100lm  | Cree (06) |
| LL.O07.WL.16935-57W3k  | 57W     | 3000K | 7400lm  | Cree (06) |
| LL.O07.WL.16935-57W4k  | 57W     | 4000K | 7700lm  | Cree (06) |
| LL.O07.WL.16935-57W6k  | 57W     | 6000K | 8000lm  | Cree (06) |
| LL.O07.WL.16935-84W2k  | 84W     | 2700K | 9700m   | Cree (06) |
| LL.O07.WL.16935-84W3k  | 84W     | 3000K | 10100m  | Cree (06) |
| LL.O07.WL.16935-84W4k  | 84W     | 4000K | 10500lm | Cree (06) |
| LL.O07.WL.16935-84W6k  | 84W     | 6000K | 10900lm | Cree (06) |
| LL.O07.WL.16935-105W2k | 105W    | 2700K | 11250lm | Cree (06) |
| LL.O07.WL.16935-105W3k | 105W    | 3000K | 11700lm | Cree (06) |
| LL.O07.WL.16935-105W4k | 105W    | 4000K | 12200lm | Cree (06) |
| LL.O07.WL.16935-105W6k | 105W    | 6000K | 12700lm | Cree (06) |
| LL.O07.WL.16935-120W2k | 120W    | 2700K | 11500lm | Cree (06) |
| LL.O07.WL.16935-120W3k | 120W    | 3000K | 11975lm | Cree (06) |
| LL.O07.WL.16935-120W4k | 120W    | 4000K | 12475lm | Cree (06) |
| LL.O07.WL.16935-120W6k | 120W    | 6000K | 12975lm | Cree (06) |